


[Shape the Future of QuickSpecs - Your Input Matters](#)

HPE ProLiant DL380 Gen11 QuickSpecs

Adaptable for diverse workloads and environments, the secure 2P 2U HPE ProLiant DL380 Gen11 Server delivers world-class performance with the right balance of expandability and scalability.

The HPE DL380 Gen11 is designed for supreme versatility and resiliency while being backed by a comprehensive warranty, makes it ideal for multiple environments from Containers to Cloud to Big Data. Standardize on the industry's most trusted compute platform.

HPE ProLiant DL380 Gen11

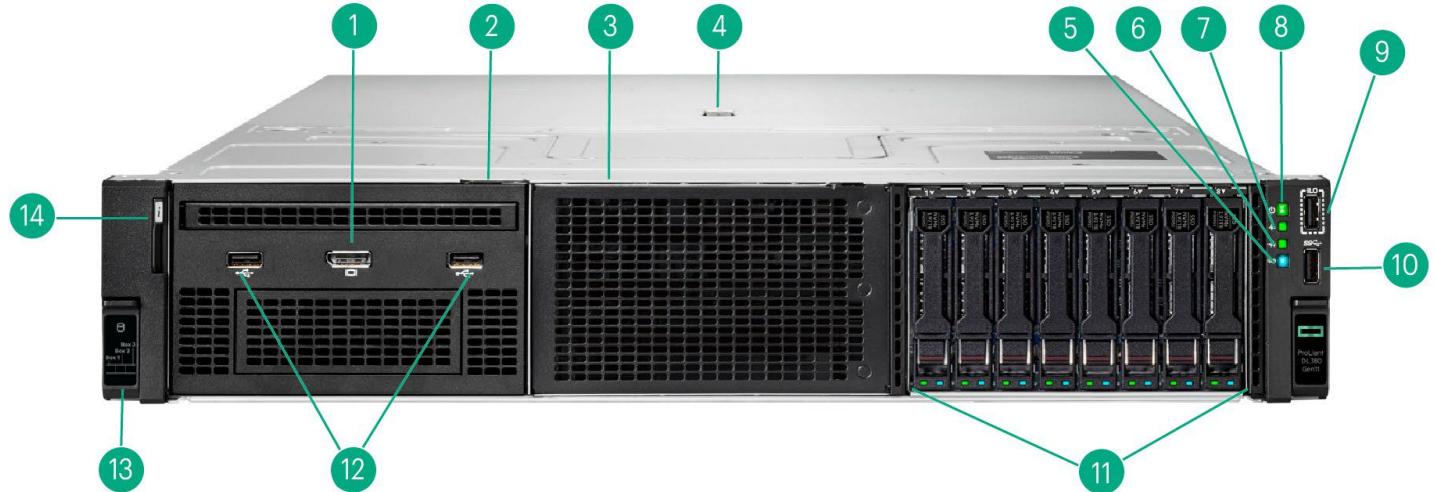


Front View – 8SFF chassis with optional Universal Media Bay shown

Item	Description	Item	Description
1.	Optional Front DisplayPort (via Universal Media Bay)	8.	Power On / Standby button / LED
2.	Box 1 (shown with optional Universal Media Bay installed)	9.	iLO Service Port
3.	Box 2 (Empty)	10.	USB 3.2 Gen1
4.	Quick removal access panel	11.	Box 3 (shown with 8SFF drives populated)
5.	Unit Identification button/LED	12.	Optional USB 2.0 port (via Universal Media Bay)
6.	NIC Status ¹	13.	Drive Support Label
7.	Health LED	14.	Serial Number Label Pull Tab

Notes: ¹Front NIC LED display doesn't support NIC LED ACT/LINK indication from ALOM/PCIe/FLOM NICs


Overview

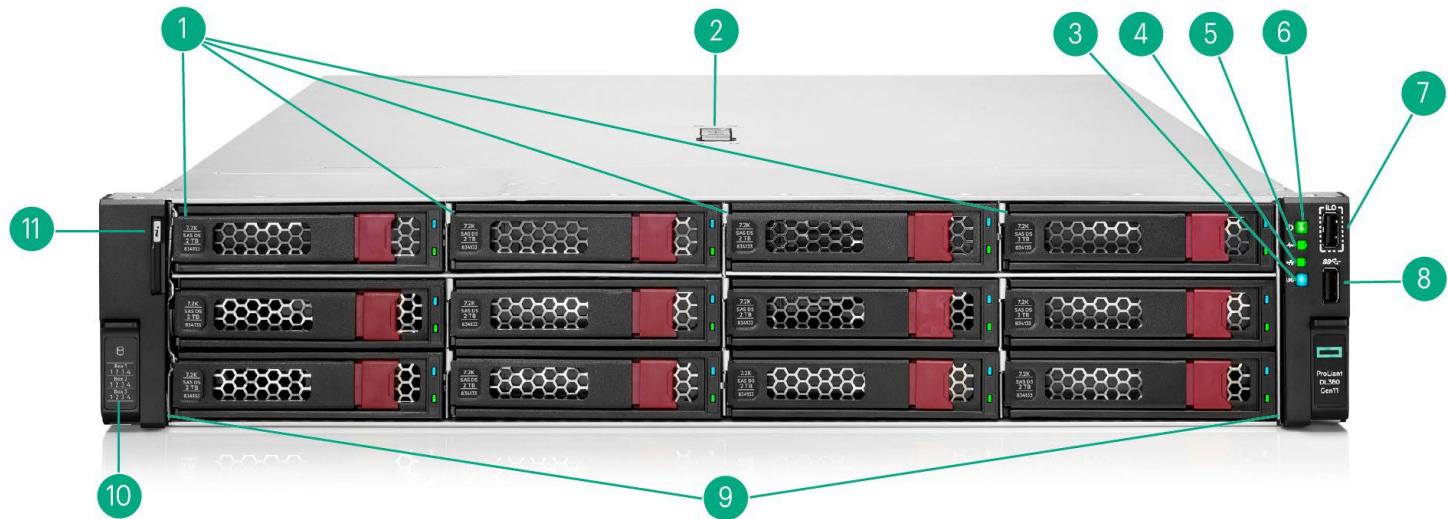

Front View – 12LFF chassis shown

Item	Description	Item	Description
1.	Quick removal access panel	6.	iLO Service Port
2.	Unit Identification Button / LED	7.	USB 3.2 Gen1 Port
3.	NIC Status	8.	12 x LFF Media
4.	Health LED	9.	Drive support label
5.	Power On / Standby button / LED	10.	Serial Number Label Pull Tab


Overview

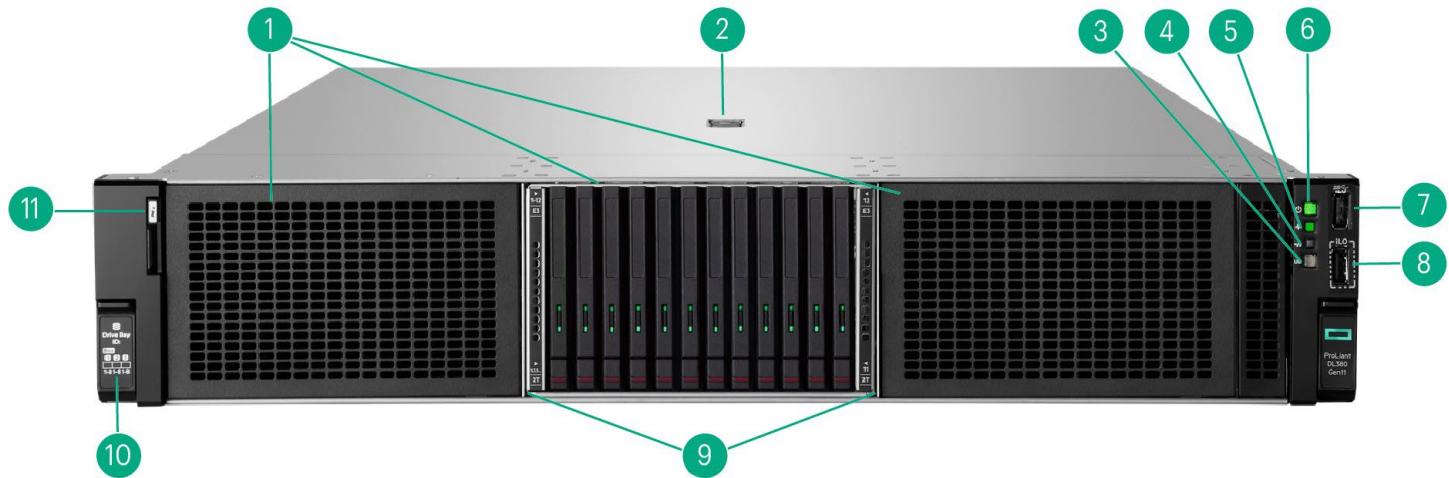

Front View -12EDSFF chassis shown

Item	Description	Item	Description
1	12EDSFF drive bays optical drive	7	iLO Service Port
2	Quick removal access panel	8	USB 3.2 Gen1
3	UID Button / LED	9	12x EDSFF Media
4	NIC Status	10	Drive support label
5	Health LED	11	Serial Number Label Pull Tab
6	Power On / Standby button and LED		

Overview

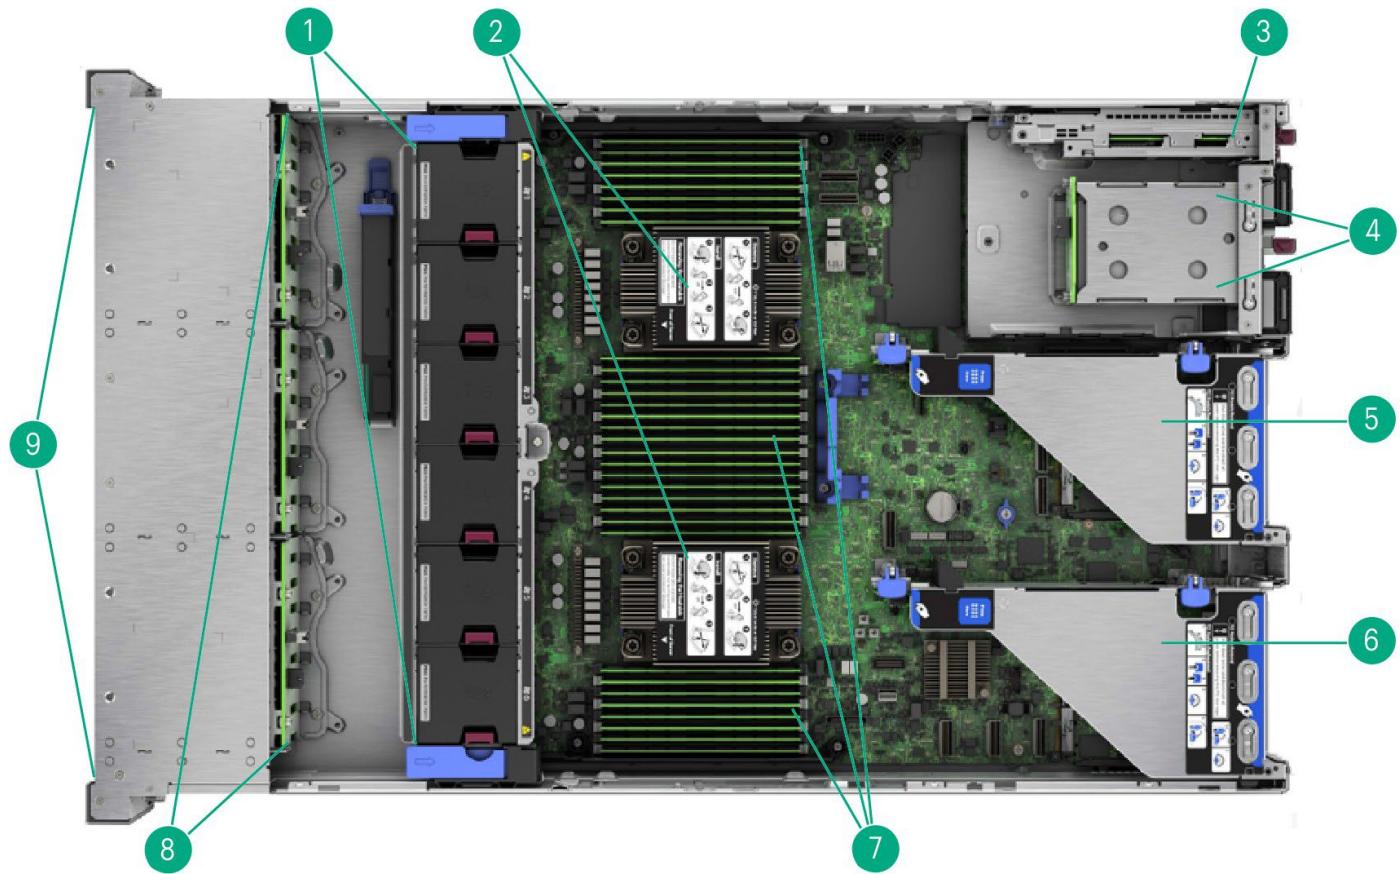


Internal View 8SFF chassis

Item	Description	Item	Description
1.	Hot Plug Fans ¹	6.	Primary Riser
2.	Processors with heatsinks shown	7.	DIMM slots, shown fully populated in 32 slots ²
3.	Optional NS204i-u Boot Device	8.	Drive Backplanes
4.	Hot Plug redundant HPE Flexible Slot Power Supplies	9.	Drive Cages
5.	Secondary Riser (Optional) (Requires second processor)		

Notes:

- ¹High-performance temperature fans optional
- ²Shown fully populated in 32 slots (16 per processor)

Overview

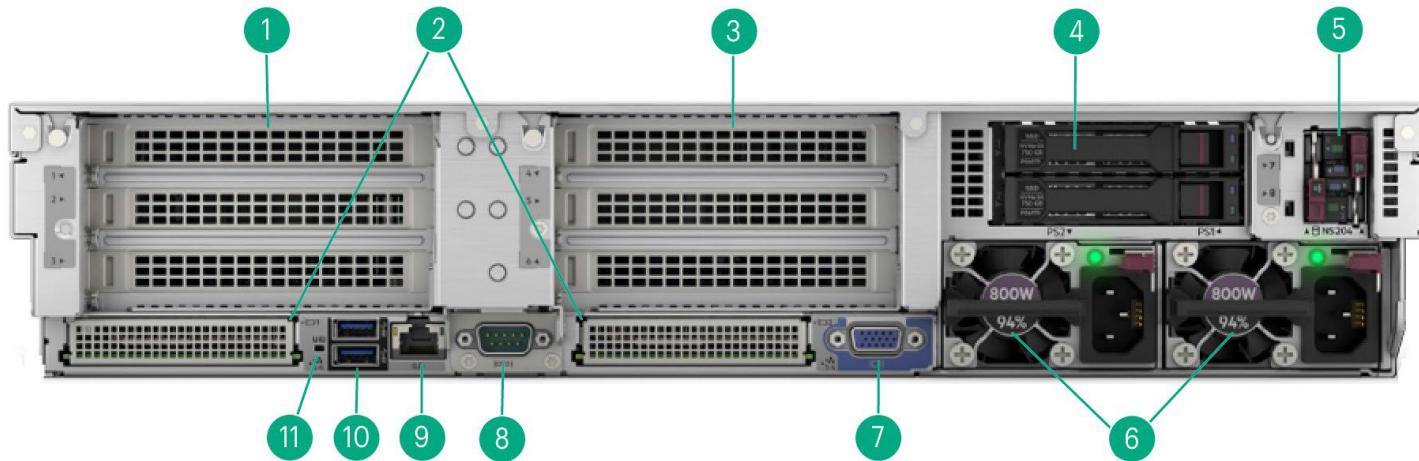

Rear View – Standard for all DL380 Gen11

Item	Description	Item	Description
1.	Primary Riser. PCIe 5.0 Slots (Slots 1-3)	7.	VGA Connector
2.	OCP NIC 3.0 Slots, shown covered	8.	Serial Port Optional
3.	Secondary Riser. PCIe 5.0 Slots (Slots 4-6)	9.	Dedicated iLO Management Port
4.	Tertiary Riser (Slots 7-8) shown with optional 2SFF drive cage installed	10.	USB 3.2 Gen1 Connectors (2)
5.	Optional NS204i-u Boot Device	11.	UID Indicator LED
6.	Power Supply		

Notes: ¹Supports various NICs, and Storage controllers.

Platform Information

Form Factor

- 2U rack

Chassis Types

- 8SFF (SAS/SATA/NVMe) with optional 6SFF Universal Media Bay (P50728-B21), and/or up to 6SFF rear drive bay options.
- 24SFF bay (SAS/SATA/NVMe) with up to 6SFF rear drive bay options for a total 30 SFF drives.
- 8LFF supporting 2SFF front, and up to 4LFF rear or 2SFF rear drive bay options.
- 12LFF with optional 4LFF rear for a total of 16LFF drives.
- 12EDSFF (NVMe) supporting up to 36 EDSFF in front and up to 2SFF rear drive bay option

Notes:

- The 8SFF chassis is upgraded to support up to 24SFF (front) with a variety of 8SFF Drive Cages to select from, including 8SFF U.3 x4/x2 Trimode, 8SFF U.3 (x1 Trimode), and 8SFF SAS/SATA. See “Drive Cages” section within this document for options.
- The 8SFF chassis comes with an 8SFF U.3 x1 Trimode drive bay by default in bay 3.
- The Universal Media Bay (P50728-B21) is only available as an option for the 8SFF chassis and can only be populated in Box 1.

Overview

- The 2LFF primary and 2LFF secondary rear cages will consume all PCIe slots for the primary and secondary riser, respectively
- The 8LFF chassis cannot be upgraded to 12LFF front in the field.
- The 2LFF primary and 2LFF secondary rear cages supported in LFF chassis only.

System Fans

- High-performance Fan Kit – required for all CPUs over 205W TDP.

Notes:

- On 8SFF CTO server models ship with 4 standard fans.
- The 12LFF and 8LFF CTO server models ship with 4 standard fans.
- The 24SFF CTO server model ships with 6 high-performance fans.
- The High-Performance fan kit (P48820-B21) is available to meet ambient temperature requirements.
- In general, the Maximum Performance fan kit is required when rear drives, or >205W Processors SKUs, or High-performance NVMe drives, three drive cages, mid-tray, GPU card, or certain backplanes are populated. See notes under each option category or each individual option for specifics.

Standard Features

Processors – Up to 2 of the following depending on model.

- The 2nd digit of the processor model number “x4xx” is used to denote the processor generation (i.e. 4=4th generation Intel® Scalable Series Processors)
- The required firmware for the 5th Generation Intel® Xeon® Processors is not compatible with the DL380 Gen11 system board shipped with the 4th Generation Intel® Xeon® Processors. A new server order (latest firmware system board) is required for the activation of the 5th Generation Intel® Xeon® Processors. Field upgrade from the 4th Generation Intel® Xeon® Processors to the 5th Generation is not supported.

For more information regarding Intel® Xeon® processors, refer to the following <https://www.intel.com/xeon>.

This table covers the public Intel® offering only.

Processors Suffix Definitions

Processor Suffix	Description	Offering
H	Database and Analytics	Highest core counts. Database and Analytics usages benefit from Intel® Data Streaming Accelerator (DSA) and Intel® In-Memory Accelerator Analytics (IAA)
M	Media Transcode	Optimized for Intel® Advanced Vector Extensions (AVX) frequencies to deliver better performance/watt for Media, AI, and HPC workloads.
N	Network/5G/Edge (High Throughput / Low Latency)	Designed for Network Function Visualization and networking workloads, such as: L3 forwarding, 5G User Plane Function, Open vSwitch Data Plane Development Kit, Vector Packet Processing FIB router, VPP IPsec, web server/NGINX, vEPC, vBNG, and vCMTS.
S	Storage and HCI	Optimized for Storage UMA use cases with increased UPI Bandwidth for vs Mainline SKUs.
P	Cloud – IAAS	Designed for cloud IaaS environments to deliver higher frequencies at constrained TDPs.
Q	Liquid Cooling	Liquid cooled processors with higher frequency and performance at same TDP.
U	Single Socket Optimized	Optimized for targeted platforms adequately served by the cores, memory bandwidth and IO capacity available from a single processor
V	Cloud – SAAS	Optimized for orchestration efficiency that delivers higher core counts and VMs per rack.
Y	Intel® SST-PP (Speed Select Technology - Performance Profile)	Intel® SST-PP increases base frequency when fewer cores are enabled. Allows greater flexibility, deployment options and platform longevity.

Standard Features

5 th Generation Intel® Xeon® Scalable Processor Family (Platinum)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Platinum 8593Q Processor	2.2 GHz	64	320 MB	385 W	4	5600 MT/s	512 GB	XCC
Platinum 8592+ Processor	1.9 GHz	64	320 MB	350 W	4	5600 MT/s	512 GB	XCC
Platinum 8592V Processor	2.0 GHz	64	320 MB	330 W	3	4800 MT/s	512 GB	XCC
Platinum 8581V ¹ Processor	2.0 GHz	60	300 MB	270 W	0	4800 MT/s	512 GB	XCC
Platinum 8580 Processor	2.0 GHz	60	300 MB	350 W	4	5600 MT/s	512 GB	XCC
Platinum 8570 Processor	2.1 GHz	56	300 MB	350 W	4	5600 MT/s	512 GB	XCC
Platinum 8568Y Processor	2.3 GHz	48	300 MB	350 W	4	5600 MT/s	512 GB	XCC
Platinum 8562Y+ Processor	2.8 GHz	32	60.0 MB	300 W	3	5600 MT/s	512 GB	MCC
Platinum 8558P Processor	2.7 GHz	48	260 MB	350 W	3	5600 MT/s	512 GB	XCC
Platinum 8558 Processor	2.1 GHz	48	260 MB	330 W	4	5200 MT/s	512 GB	XCC
Platinum 8558U1 Processor	2.0 GHz	48	260 MB	300 W	0	4800 MT/s	512 GB	XCC

Notes:

- In 300 Watt processor one socket configuration, the air cooling with Performance Heatsinks & Performance Fan Kits can be supported. Field upgrade to two socket is not supported with air cooling solution.
- ¹Single socket only, no dual socket support
- Intel® Speed Select enabled processors: Platinum 8593Q, 8592V, 8581V, 8568Y+, 8562Y+, 8558P, 8558 and 8558U

5 th Generation Intel® Xeon® Scalable Processor Family (Gold 6)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Gold 6558Q Processor	3.2 GHz	32	60.0 MB	350 W	3	5200 MT/s	128 GB	MCC
Gold 6554S Processor	2.2 GHz	36	180 MB	270 W	4	5200 MT/s	128 GB	XCC
Gold 6548N Processor	2.8 GHz	32	60.0 MB	300 W	3	5200 MT/s	128 GB	MCC
Gold 6548Y+ Processor	2.5 GHz	32	60.0 MB	250 W	3	5200 MT/s	128 GB	MCC
Gold 6544Y Processor	3.6 GHz	16	45.0 MB	270 W	3	5200 MT/s	128 GB	MCC
Gold 6542Y Processor	2.9 GHz	24	60.0 MB	250 W	3	5200 MT/s	128 GB	MCC
Gold 6538N Processor	2.1 GHz	32	60.0 MB	205 W	3	5200 MT/s	128 GB	MCC
Gold 6538Y+ Processor	2.2 GHz	32	60.0 MB	225 W	3	5200 MT/s	128 GB	MCC
Gold 6534 Processor	3.9 GHz	8	22.5 MB	195 W	3	4800 MT/s	128 GB	MCC
Gold 6530 Processor	2.1 GHz	32	160 MB	270 W	3	4800 MT/s	128 GB	XCC
Gold 6526Y Processor	2.8 GHz	16	37.5 MB	195 W	3	5200 MT/s	128 GB	MCC

Standard Features

5 th Generation Intel® Xeon® Scalable Processor Family (Gold 5)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Gold 5520+ Processor	2.2 GHz	28	52.5 MB	205 W	3	4800 MT/s	128 GB	MCC
Gold 5515+Processor	3.2 GHz	8	22.5 MB	165 W	3	4800 MT/s	128 GB	MCC

Notes:

- One or two processor(s)
- Intel® Speed Select enabled processors: N.A.

5 th Generation Intel® Xeon® Scalable Processor Family (Silver)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Silver 4516Y+ Processor	2.2 GHz	24	45.0 MB	185 W	2	4400 MT/s	64 GB	MCC
Silver 4514Y Processor	2.0 GHz	16	30.0 MB	150 W	2	4400 MT/s	64 GB	MCC
Silver 4510 Processor	2.4 GHz	12	30.0 MB	150 W	2	4400 MT/s	64 GB	EE LCC
Silver 4509Y Processor	2.6 GHz	8	22.5 MB	125 W	2	4400 MT/s	64 GB	EE LCC

Notes:

- One or two processor(s)
- Intel® Speed Select enabled processors: 4516Y+, 4514Y and 4509Y

5 th Generation Intel® Xeon® Scalable Processor Family (Bronze)								
Intel® Xeon® Models	Frequency	Cores	L3 Cache	Power	UPI	DDR5	SGX Enclave size	Die
Bronze 3508U Processor1	2.1 GHz	8	22.5 MB	125 W	N/A	4400 MT/s	64 GB	EE LCC

Notes:

- ¹Single socket capable, no dual socket support
- Intel® Speed Select enabled processors: N.A.
- If 3508U is selected, then 96GB 5600MT/s Memory cannot be selected
- PCIe4.0 only

Standard Features

4 th Generation Intel® Xeon® Scalable Processor Family (Platinum)							
Intel® Xeon® Model	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Platinum 9462 Processor ²	2.7 GHz	32	75	350 W	3	4800 MT/s	128
Platinum 8490H Processor	1.9 GHz	60	112.5	350 W	4	4800 MT/s	512
Platinum 8480+ Processor	2.0 GHz	56	105	350 W	4	4800 MT/s	512
Platinum 8470 Processor	2.0 GHz	52	105	350 W	4	4800 MT/s	512
Platinum 8470N Processor	1.7 GHz	52	97.5	300 W	4	4800 MT/s	128
Platinum 8470Q Processor ¹	2.1 GHz	52	105	350 W	4	4800 MT/s	512
Platinum 8468 Processor	2.1 GHz	48	105	350 W	4	4800 MT/s	512
Platinum 8468V Processor	2.4 GHz	48	97.5	330 W	3	4800 MT/s	128
Platinum 8462Y+ Processor	2.8 GHz	32	60	300 W	3	4800 MT/s	128
Platinum 8460Y+ Processor	2.0 GHz	40	105	300 W	4	4800 MT/s	128
Platinum 8458P Processor	2.7 GHz	44	82.5	350 W	3	4800 MT/s	512
Platinum 8452Y Processor	2.0 GHz	36	67.5	300 W	3	4800 MT/s	128
Platinum 8444H Processor	2.9 GHz	16	45	270 W	4	4800 MT/s	512

Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP equal to or greater than 150 W through 350 W require High-performance Heatsink (P48818-B21)
- Processors with TDP greater than 205 W through 350 W and mid-tray drive cage require HPE DL3xx/560 Gen11 High-performance Heatsink (P48905-B21)
- “Q” processors require Max Performance Heatsink (P48817-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)
- ¹Liquid cooled CPUs require Maximum Performance Heat Sink (P48817-B21). One heatsink covers both CPUs.
- ²This is Intel® High Bandwidth Memory (HBM) CPU.

Standard Features

4 th Generation Intel® Xeon® Scalable Processor Family (Gold)							
Intel® Xeon® Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Gold 6454S Processor	2.2 GHz	32	60	270 W	4	4800 MT/s	128
Gold 6448H Processor	2.4 GHz	32	60	250 W	3	4800 MT/s	512
Gold 6430 Processor	2.1 GHz	32	60	270 W	3	4400 MT/s	128
Gold 6414U Processor ¹	2.0 GHz	32	60	250 W	0	4800 MT/s	128
Gold 6458Q Processor	3.1 GHz	32	60	350 W	3	4800 MT/s	128
Gold 6448Y Processor	2.1 GHz	32	60	225 W	3	4800 MT/s	128
Gold 6444Y Processor	3.6 GHz	16	45	270 W	3	4800 MT/s	128
Gold 6442Y Processor	2.6 GHz	24	60	225 W	3	4800 MT/s	128
Gold 6438N Processor	2.0 GHz	32	60	205 W	3	4800 MT/s	128
Gold 6438Y+ Processor	2.0 GHz	32	60	205 W	3	4800 MT/s	128
Gold 6434 Processor	3.7 GHz	8	22.5	195 W	3	4800 MT/s	128
Gold 6426Y Processor	2.5 GHz	16	37.5	185 W	3	4800 MT/s	128
Gold 6421N Processor	1.8 GHz	32	60	185 W	0	4400 MT/s	128
Gold 6418H	2.1 GHz	24	60	185 W	3	4800 MT/s	512
Gold 6416H	2.2 GHz	18	45	165 W	3	4800 MT/s	512
Gold 5415+ Processor	2.9 GHz	8	22.5	150 W	3	4400 MT/s	128
Gold 5416S Processor	2.0 GHz	16	30	150 W	3	4400 MT/s	128
Gold 5418N Processor	1.8 GHz	24	45	165 W	3	4000 MT/s	128
Gold 5418Y Processor	2.0 GHz	24	45	185 W	3	4400 MT/s	128
Gold 5420+ Processor	2.0 GHz	28	52.5	205 W	3	4400 MT/s	128
Gold 5411N Processor	1.9 GHz	24	45	165 W	0	4400 MT/s	128

Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP greater than 150W through 350W require High-performance Heatsink (P48818-B21)
- Processors with TDP greater than 205W through 350W and mid-tray drive cage require HPE DL3xx/560 Gen11 High-performance Heatsink (P48905-B21)
- “Q” processors require Max Performance Heatsink (P48817-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)
- 8-Channel DDR5 @ 4800 MT/s
- ¹Single socket processor. No dual socket support.

Standard Features

4 th Generation Intel® Xeon® Scalable Processor Family (Silver)							
Intel® Xeon® Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Silver 4410Y Processor	2.0 GHz	12	30	150 W	2	4000 MT/s	64
Silver 4416+ Processor	2.0 GHz	20	37.5	165 W	2	4000 MT/s	64

Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP greater than 150W through 350W require High-performance Heatsink (P48818-B21)
- Processors with TDP greater than 205W through 350W and mid-tray drive cage require HPE DL3xx/560 Gen11 High-performance Heatsink (P48905-B21)
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)

4 th Generation Intel® Xeon® Scalable Processor Family (Bronze)							
Intel® Xeon® Models	CPU Frequency	Cores	L3 Cache (MB)	Power	UPI Links	DDR5	SGX Enclave size (GB)
Bronze 3408U	1.8 GHz	8	22.5	125 W	0	4000 MT/s	64

Notes:

- Processors do not ship with heatsinks or fan kits, these must be ordered separately.
- Processors with TDP equal to or less than 150W require Standard Heatsink (P49145-B21)

Chipset

Intel® C741 Chipset

Notes: For more information regarding Intel® chipsets, refer to the following URL:
<https://www.intel.com/content/www/us/en/products/chipsets/server-chipsets.html>

On System Management Chipset

HPE iLO 6 ASIC

Read and learn more in the [iLO QuickSpecs](#).

Standard Features

Memory

One of the following depending on model.

Type	HPE DDR5 Smart Memory, Registered (RDIMM)
DIMM Slots Available	32 16 DIMM slots per processor, 8channels per processor, 2 DIMMs per channel
Maximum capacity	8.0 TB 32 x 256 GB RDIMM @ 4800 MT/s (32 DIMMs only with 8SFF or 16SFF, 16 DIMMs maximum with 24SFF)

Notes: The maximum memory speed is limited by the processor selection.

Memory Protection

One of the following depending on model.

Advanced ECC

Advanced ECC uses single device data correction to detect and correct single and all multi-bit errors that occur within a single DRAM chip.

Expansion Slots

Primary Riser

Notes:

- Bus width indicates the number of physical electrical lanes running to the connector.
- There are 2 types of risers supported on Primary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Primary Riser1					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 1

Primary Riser2					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
1**	NA	NA	NA	NA	NA
1	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
2	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 1
3	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 1

Notes: ** If Slot 1 of HPE DL380 Gen11 2U 3x16 Prim Riser Kit needs to be enabled then 3 x16 Primary Cable Kit (P56073-B21) must be selected.

Secondary Riser:

Notes:

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- There are 2 types of risers support on Secondary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Standard Features

Secondary Riser1					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X8	X16	Full-height, half-length slot	Proc 2

Secondary Riser2					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
4*	NA	NA	NA	NA	NA
4	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
5	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
6	PCIe 5.0	X16	X16	Full-height, half-length slot	Proc 2

Notes: * If Slot 4 of HPE DL380 Gen11 2U 3x16 Sec Riser Kit needs to be enabled then 3 x16 Secondary Cable Kit (P56074-B21) must be selected.

Tertiary Riser

Notes:

- Bus Width Indicates the number of physical electrical lanes running to the connector.
- There is 1 type of riser supported on the Tertiary Slot
- x16 cards installed on x8 slots could observe sub-optimal performance.

Tertiary Riser1 (default)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 4.0	X16	X16	Full-height, full-length slot	Proc 2

Tertiary Riser1 (with Optional Tertiary Riser FIO x8 Enablement Kit P53632-B21)					
Slots #	Technology	Bus Width	Connector Width	Slot Form Factor	Notes
7	PCIe 5.0	X16	X16	Full-height, full-length slot	Proc 2
8	PCIe 5.0	X8	X16	Full-height, full-length slot	Proc 2

Standard Features

Graphics

Integrated Video Standard

- Video modes up to 1920 x 1200@60Hz (32 bpp)
- 16MB Video Memory

Maximum Internal Storage

Drive	Capacity	Configuration
Hot Plug SFF SAS HDD	91.2 TB	24+8+6 x 2.4 TB
Hot Plug SFF SAS SSD	583.3 TB	24 +8+6 15.35 TB
Hot Plug SFF SATA HDD	76 TB	24+8+6 x 2 TB
Hot Plug SFF SATA SSD	291.84 TB	24 +8+ 6 x 7.68 TB
Hot Plug LFF SAS HDD	360 TB	12+4+4x 18 TB (with optional rear LFF drive cage)
Hot Plug LFF SATA HDD	360 TB	12+4+4 x 18 TB (with optional rear LFF drive cage)
Hot Plug SFF NVMe PCIe SSD	374.4 TB	24+ x 15.36 TB + 6 x 960GB<10W (with optional rear Primary and Secondary 2SFF and rear 2SFF drive cages)
EDSFF NVMe	550.8 TB	36EDSFF Drives x 15.3 TB

Notes:

- If all seven Drive cages are selected, then maximum SAS Drive support will be 30 drives (16+8+6).
- Maximum SAS Drive support can be 36 Drives (24+8+4), if one 2SFF Primary / Secondary cage is not selected.

Internal Storage Devices

– Optical Drive

Optional: DVD-ROM, DVD-RW

– Hard Drives

None shipped as standard

Power Supply

- HPE 1800W-2200W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes: 1 available in 96% efficiency.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: 1 available in 94% efficiency.
- HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
- HPE 1000W Flex Slot Titanium Hot Plug Low Halogen Power Supply Kit
Notes: 1 available in 96% efficiency.
- HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Notes: 1 available in 94% efficiency.

Standard Features

HPE Flexible Slot (Flex Slot) Power Supplies share a common electrical and physical design that allows for hot plug, tool-less installation into HPE ProLiant Gen11 Performance Servers. Flex Slot power supplies are certified for high-efficiency operation and offer multiple power output options, allowing users to "right-size" a power supply for specific server configurations. This flexibility helps to reduce power waste, lower overall energy costs, and avoid "trapped" power capacity in the data center.

A standard 6-foot IEC C-13/C-14 jumper cord (AOK02A) is included with each standard AC power supply option kit. If a different power cord is required, please check the [ProLiant Power Cables](#) web page. Review the power requirements for your selected system, please use the [HPE Power Advisor Tool](#).

For information on power specifications and technical content visit [HPE Server power supplies](#).

Storage Controllers

The available Gen11 controllers are depicted below.

Hybrid RAID Controller

- **Intel® VROC SATA for HPE ProLiant Gen11**

Notes:

- All models feature an embedded storage controller, with embedded software SATA RAID support for up to 14 bays.
- Intel® VROC for HPE ProLiant Gen11 is an enterprise, hybrid RAID solution specifically designed for SSDs.
- Intel® VROC is a software-based solution utilizing Intel® CPU to RAID or HBA direct connected drives.
- RAID Support- 0/1/5/10.
- Windows and Linux OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- iLO Support- IML, Alert, SNMP, AHS.
- iLO Redfish- Redfish Read.
- Intel® VROC SATA for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional storage controller will be needed.
- Intel® VROC SATA is off by default and must be enabled.
- VROC cannot support mix among SATA/sSATA/tSATA due to VROC limitation. Visit [Intel Virtual RAID on CPU for HPE Gen11 User Guide](#).
 - 12LFF: Mix of raid is not allowed across boxes/drive bays. Each LFF drive cage (box1/2/3) has four bays and is separated with different drive groups with Intel® VROC SATA RAID configuration.
 - 8SFF: Mix of raids is not allowed across boxes/drive bays. One box contains 8 bays and is separated into two drive groups (Bay1-4 and Bay5-8) with Intel® VROC SATA RAID configuration.

- **Intel® VROC NVMe for HPE ProLiant Gen11**

Notes:

- All models feature 4 x8 PCIe 5.0 connectors per socket for NVMe connectivity, provides support for up to 8 direct attach x4 NVMe bays.

Standard Features

- Only supported on SFF models.
- Intel® VROC for HPE ProLiant Gen11 is an enterprise, hybrid RAID solution specifically designed for NVMe SSDs connected directly to the CPU. Intel® VROC is a software-based solution utilizing Intel® CPU to RAID or HBA direct connected drives.
- Intel® Virtual RAID on CPU Standard for RAID 0/1/10 (S3Q19A/S3Q39AAE) or Premium SKU for RAID 0/1/5/10 (R7J57A/R7J59AAE) must be ordered to enable RAID support.
- Windows, Linux, VMware OS support.
- Host Tools- Windows GUI/CLI, Linux CLI.
- UEFI Support- HII Utility, OBSE.
- Active health monitoring of NVMe M.2 drives requires use of SMART tools.
- Intel® VROC NVMe for HPE ProLiant Gen11 will operate in UEFI mode only. For legacy support an additional Tri-
- Mode controller will be needed.
- For NVMe SSDs only, there is no PCIe card support.

Essential RAID Controller

- HPE Smart Array E208e-p SR Gen10 Controller

Tri-Mode Controller

- HPE MR416i-p Gen11 Controller
- HPE MR416i-o Gen11 Controller
- HPE MR216i-p Gen11 Controller
- HPE MR216i-o Gen11 Controller
- HPE MR408i-o Gen11 Controller
- HPE SR932i-p Gen11 Controller^{1,2}

Notes:

- PE80xx NVMe drives are not supported.
- ¹Requires x16 physical and electrical riser slot
- ²If second controller is required, you must select secondary riser
- Controllers with cache require either P02377-B21 HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit or P01366-B21 HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit.
- Requires HPE ProLiant DL360 Gen11 Storage Controller Enablement Cable Kit (P48918-B21)

Interfaces

Serial	Optional Rear
DisplayPort	1 optional front DisplayPort via Universal Media Bay
VGA Port	1 standard, rear for all chassis. 1 Optional front DisplayPort (Via Universal Media Bay) Notes: Both ports are not active simultaneously.
Network Ports	Nonstandard. Choice of OCP networking card or stand-up networking card required. BTO models will come pre-selected with a primary networking card.
HPE iLO Remote Management Network Port	1 Gb Dedicated, rear
Front iLO Service Port	1 standard (Not available when System Insight Display Kit is ordered)
USB 3.2 Port Gen1	Up to 4 total: 1 front (3.2 Gen1), 2 rear (3.0), 2 internal (secure – 1 – 3.2 Gen1, 1 – 2.0), 1 optional USB 2.0 front via Universal Media Bay
System Insight Display (SID)	Optional Notes: Not shipping as standard. Available as a CTO option or as a field upgrade (P48819-B21).

Operating Systems and Virtualization Software Support for HPE Servers

HPE servers are designed for seamless integration with partner Operating Systems and Virtualization Software. By collaborating closely with our partners, we ensure that their products are optimized, certified, and fully supported within your HPE server environment.

Access the certified and supported servers for each of the OS and Virtualization software: [HPE Servers Support & Certification Matrices](#)

HPE Server UEFI

Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen11 servers have a UEFI Class 3 implementation to support UEFI Mode.

Notes: The UEFI System Utilities tool is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit <https://www.hpe.com/servers/uefi>.

UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:

- Secure Boot and Secure Start enable for enhanced security
- Embedded UEFI Shell
- Operating system specific functionality
- Mass Configuration Deployment Tool using iLO RESTful API that is Redfish API Conformant
- Support for > 2.2 TB (using GPT) boot drives
- PXE boot support for IPv6 networks
- USB 3.0 Stack

Standard Features

- Workload Profiles for simple performance optimization

UEFI Boot Mode only

- TPM 2.0 Support

Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.

- iSCSI Software Initiator Support.
- NVMe Boot Support
- HTTP/HTTPs Boot support as a PXE alternative.
- Platform Trust Technology (PTT) can be enabled.
- Boot support for option cards that only support a UEFI option ROM

Notes: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI.

Industry Standard Compliance

- ACPI 6.4 Compliant
- PCIe 5.0 Compliant
- Wake on LAN (WoL) Support
- Microsoft® Logo certifications
- PXE Support
- VGA
- DisplayPort

Notes: This support is on the optional Universal Media Bay.

- USB 3.2 Gen1 Compliant
- USB 2.0 Compliant (via Universal Media Bay)

Notes: This support is on the optional Universal Media Bay.

- Energy Star
- SMBIOS 3.4
- Redfish API
- IPMI 2.0
- Secure Digital 4.0
- 2.0 Support

Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.

- Advanced Encryption Standard (AES)
- Triple Data Encryption Standard (3DES)
- SNMP v3
- TLS 1.2
- DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP)
- Active Directory v1.0
- ASHRAE A3/A4

Notes: For additional technical, thermal details regarding ambient temperature, humidity, and feature support, please visit [DL380 Gen11 Extended Ambient Temperature Guidelines](#)

Standard Features

- European Union ErP Lot 9 Regulation

Notes:

- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, Ireland, Switzerland or Turkey, must include more efficient AC power supplies: 94% for multi-output and 96% for single-output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements.
- HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.
- Please visit: <https://www.hpe.com/us/en/about/environment/msds-specs-more.html> for more information regarding HPE Lot 9 conformance.
- UEFI (Unified Extensible Firmware Interface Forum) 2.8

Embedded Management

HPE Integrated Lights-Out (HPE iLO)

Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Learn more at <https://www.hpe.com/info/iLO>.

UEFI

Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI).

Intelligent Provisioning

Hassle free server and OS provisioning for 1 or more servers with Intelligent Provisioning.

Learn more at https://support.hpe.com/connect/s/product?language=en_US&kmpmoid=5219984&tab=manuals

iLO RESTful API

iLO RESTful API is DMTF Redfish API implementation and offers simplified server management automation such as configuration and maintenance tasks based on modern industry standards. Learn more at <https://www.hpe.com/info/restfulapi>.

OpenBMC Support

OpenBMC Capable through iLO6 Transfer of Ownership Process.

Learn more at [OpenBMC Support](#)

Active Health System

The HPE Active Health System (AHS) is an essential component of the iLO management portfolio that provides continuous, proactive health monitoring of HPE servers. Learn more at <https://www.hpe.com/servers/ahs>.

Smart Update

Keep your servers up to date with the HPE Smart Update solution by using Smart Update Manager (SUM) to optimize the firmware and driver updates of the Service Pack for ProLiant (SPP).

Standard Features

iLO Amplifier Pack

Designed for large enterprise and service provider environments with hundreds of HPE servers, the iLO Amplifier Pack is a free, downloadable open virtual application (OVA) that delivers the power to discover, inventory and update Gen8, Gen9 and Gen10 HPE servers. Use with an iLO Advanced License to unlock full capabilities.

Learn more at <https://www.hpe.com/servers/iLoamplifierpack>

RESTful Interface Tool

RESTful Interface tool (iLOREST) is a single scripting tool to provision using iLO RESTful API to discover and deploy servers at scale. Learn more at <https://www.hpe.com/info/resttool>.

Scripting Tools

Provision one to many servers using your own scripts to discover and deploy with Scripting Tool (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at <https://www.hpe.com/servers/powershell>.

HPE OneView Standard

HPE OneView is an on premise, multi-generational server monitoring and management solution. HPE OneView Standard can be used for inventory, health monitoring, alerting, and reporting without additional fees. Customers can upgrade their management experience with an HPE OneView Advanced license all provided by the same tool. Learn more at <https://www.hpe.com/info/oneview>.

HPE Compute Ops Management

Transform compute lifecycle management with a cloud experience that delivers greater simplicity, agility, and speed across your entire server environment, wherever it lives. This software-as-a-service tool provides a dashboard with global visibility and intuitive management of server health, security and compliance status to help you easily identify areas that need immediate attention. Users can update tens to thousands of servers faster through intelligent delta-based firmware downloads and on-demand HPE iLO firmware updates.

HPE Compute Ops Management is cloud-native software that is continually updated with new services, features, patches, and firmware packs. The management application resides in HPE GreenLake cloud (access via <https://common.cloud.hpe.com>) and leverages the HPE GreenLake architecture, security, and unified operations.

For a complete list of software as-a-service subscription SKUs and more information, visit the HPE Compute Ops Management QuickSpecs: <https://www.hpe.com/psnow/doc/a50004263enw>

For information on supported HPE servers, the complete list can be found here:

<https://www.hpe.com/info/com-supported-servers>

Security

- UEFI Secure Boot and Secure Start support
- Tamper-free updates – components digitally signed and verified
- Immutable Silicon Root of Trust
- Ability to rollback firmware
- FIPS 140-2 validation
- Secure erase of NAND/User data
- Configurable for PCI DSS compliance
- TPM (Trusted Platform Module) 2.0 option

Standard Features

Notes: Enabling TPM 2.0 no longer requires TPM module option kit for Gen11. It is an embedded feature.

- Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser
- Bezel Locking Kit option
- Support for Commercial National Security Algorithms (CNSA)
- Chassis Intrusion detection option
- Secure Recovery – recover critical firmware to known good state on detection of compromised firmware

Warranty

This product is covered by a global limited warranty and supported by HPE Services and a worldwide network of Hewlett Packard Enterprise Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HPE Services operational services or customized service agreements. Hard drives have either a one year or three-year warranty; refer to the specific hard drive QuickSpecs for details.

Notes: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be completed by Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have Hewlett Packard Enterprise replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available.

<https://www.hpe.com/support/ProLiantServers-Warranties>.

Server Management

HPE iLO Advanced

HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality.

HPE OneView Advanced

HPE OneView Advanced offers a sophisticated level of automation to infrastructure management by taking a template driven approach to provisioning, updating, and integrating compute, storage, and networking infrastructure. It builds upon the base features of HPE OneView Standard, provides full-featured licenses which can be purchased for managing multiple HPE server generations.

To learn more visit <https://www.hpe.com/info/oneview>.

One Config Simple (OCS/SCE)

OCS/SCE is a guided self-service tool to help sales and non-technical people provide customers with initial configurations in 3 to 5 minutes. You may then send the configuration on for configuration help, or use in your existing ordering processes. If you require "custom" rack configuration or configuration for products not available in SCE, please contact Hewlett Packard Enterprise Customer Business Center or an Authorized Partner for assistance.

<https://h22174.www2.hpe.com/SimplifiedConfig/Welcome#>

Rack and Power Infrastructure

The story may end with servers, but it starts with the foundation that makes compute go – and business grow. We've reinvented our entire portfolio of rack and power products to make IT infrastructure more secure, more practical, and more efficient. In other words, we've created a stronger, smarter, and simpler infrastructure to help you get the most out of your IT equipment. As an industry leader, Hewlett Packard Enterprise is uniquely positioned to address the key concerns of power, cooling, cable management and system access.

HPE G2 Advanced and Enterprise Racks are perfect for the server room or today's modern data center with enhanced airflow and thermal management, flexible cable management, and a 10-year Warranty to support higher density computing.

HPE G2 PDUs offer reliable power in flexible form factors that operate at temperatures up to 60°C, include color-coded outlets and load segments and a low-profile design for optimal access to the rack and support for dense rack environments.

HPE Uninterruptible Power Systems are cost-effective power protection for any type of workload. Some UPSs include options for remote management and extended runtime modules, so your critical dense data center is covered in power outages.

HPE KVM Solutions include a console and switches designed to work with your server and IT equipment reliably. We've got a cost-effective KVM switch for your first rack and multiple-connection IP switches with remote management and security capabilities to keep your data center rack up and running.

Learn more about HPE Racks, KVM, PDUs and UPSs at [HPE Rack and Power Infrastructure](#).

HPE Services

No matter where you are in your digital transformation journey, you can count on HPE Services to deliver the expertise you need when, where, and how you need it. From planning to deployment, ongoing operations and beyond, our experts can help you realize your digital ambitions.

<https://www.hpe.com/services>

Consulting Services

No matter where you are on your journey to hybrid cloud, experts can help you map out your next steps. From determining what workloads should live where, to handling governance and compliance, to managing costs, our experts can help you optimize your operations.

<https://www.hpe.com/services/consulting>

HPE Managed Services

HPE runs your IT operations, providing services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.

[HPE Managed Services | HPE](https://www.hpe.com/services/managed)

Operational services

Optimize your entire IT environment and drive innovation. Manage day-to-day IT operational tasks while freeing up valuable time and resources. Meet service-level targets and business objectives with features designed to drive better business outcomes.

<https://www.hpe.com/services/operational>

HPE Complete Care Service

HPE Complete Care Service is a modular, edge-to-cloud IT environment service designed to help optimize your entire IT environment and achieve agreed upon IT outcomes and business goals through a personalized experience. All delivered by an assigned team of HPE Services experts. HPE Complete Care Service provides:

- A complete coverage approach – edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI-driven customer experience

<https://www.hpe.com/services/completec>

HPE Tech Care Service

HPE Tech Care Service is the operational support service experience for HPE products. The service goes beyond traditional support by providing access to product specific experts, an AI-driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Tech Care Service delivers a customer-centric, AI-driven, and digitally enabled customer experience to move your business forward. HPE Tech Care Service is available on three response levels. Basic, which provides 9x5 business hour availability and a 2-hour response time. Essential, which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical, which includes a 6-hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/services/techcare>

HPE Lifecycle Services

HPE Lifecycle Services provide a variety of options to help maintain your HPE systems and solutions at all stages of the product lifecycle. A few popular examples include:

- Lifecycle Install and Startup Services: Various levels for physical installation and power on, remote access setup, installation and startup, and enhanced installation services with the operating system.
- HPE Firmware Update Analysis Service: Recommendations for firmware revision levels for selected HPE products, considering the relevant revision dependencies within your IT environment.
- HPE Firmware Update Implementation Service: Implementation of firmware updates for selected HPE server, storage, and solution products, considering the relevant revision dependencies within your IT environment.
- Implementation assistance services: Highly trained technical service specialists to assist you with a variety of activities, ranging from design, implementation, and platform deployment to consolidation, migration, project management, and onsite technical forums.
- HPE Service Credits: Access to prepaid services for flexibility to choose from a variety of specialized service activities, including assessments, performance maintenance reviews, firmware management, professional services, and operational best practices.

Notes: To review the list of Lifecycle Services available for your product go to:

<https://www.hpe.com/services/lifecycle>

For a list of the most frequently purchased services using service credits, see the [HPE Service Credits Menu](#)

Other Related Services from HPE Services

HPE Education Services

Training and certification designed for IT and business professionals across all industries. Broad catalogue of course offerings to expand skills and proficiencies in topics ranging from cloud and cybersecurity to AI and DevOps. Create learning paths to expand proficiency in a specific subject. Schedule training in a way that works best for your business with flexible continuous learning options.

<https://www.hpe.com/services/training>

Defective Media Retention

An option available with HPE Complete Care Service and HPE Tech Care Service and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and service options.

Parts and Materials

HPE will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

How to Purchase Services

Services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

- Services for customers purchasing from HPE or an enterprise reseller are quoted using HPE order configuration tools.
- Customers purchasing from a commercial reseller can find services at <https://ssc.hpe.com/portal/site/ssc/>

AI-Powered and Digitally Enabled Support Experience

Achieve faster time to resolution with access to product-specific resources and expertise through a digital and data driven customer experience

Sign into the HPE Support Center experience, featuring streamlined self-serve case creation and management capabilities with inline knowledge recommendations. You will also find personalized task alerts and powerful troubleshooting support through an intelligent virtual agent with seamless transition when needed to a live support agent.

<https://support.hpe.com/hpsc/public/home/signin>

Consume IT On Your Terms

GreenLake is the cloud delivering a unified platform experience that allows enterprises to simplify IT, reduce costs, and transform faster.

- Get faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

To learn more about HPE Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Contact information for a representative in your area can be found at "Contact HPE" <https://www.hpe.com/us/en/contact-hpe.html>

For more information: <https://www.hpe.com/services>

HPE Smart Choice Purchase Program

The HPE Smart Choice Purchase Program features popular fully configured products that can be quoted in minutes and shipped quickly through HPE Authorized Partners. Products are configured and tested in an HPE factory and stocked at HPE Authorized Distributors and Partners. The products arrive in a single box, making onsite integration easier and more efficient for partners and customers. Additionally, there are aggressively priced HPE Tech Care Services available only through the HPE Smart Choice program when you purchase an HPE Smart Choice product.

For HPE Smart Choice configuration and product details, please visit the Smart Choice Supplemental QuickSpecs: <https://www.hpe.com/psnow/doc/a50009219enw>

Pre-Configured models ship with the configurations below.

- Options can be selected from the Core or Additional options section of this QuickSpecs.
- Hewlett Packard Enterprise does not allow factory integration of options into pre-configured models. Any additional options purchased will not be shipped inside the server.
- Network Choice models do not include embedded LOM.

HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server			
SKU Number	P52560-B21 P52560-291 P52560-421	P52561-B21 P52561-291 P52561-421	P52562-B21 P52562-291 P52562-421
Model Name	P52560-B21 & P52560-291: HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server	P52561-B21 & P52561-291: HPE ProLiant DL380 Gen11 5416S 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server	P52562-B21 & P52562-291: HPE ProLiant DL380 Gen11 4410Y 2.0GHz 12-core 1P 32GB-R NC 12LFF 800W PS Server
Chassis	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 12LFF NC Configure-to-order Server
Processor	4410Y (12 core, 2.0 GHz, 150W)	5416S (16 core, 2.0 GHz, 150W)	4410Y (12 core, 2.0 GHz, 150W)
Number of Processors	One		
Memory	32 GB (1x32 GB, 4800 MT/s) Notes: Runs at 4000 MT/s due to processor limitation.	32 GB (1x32 GB, 4800 MT/s) Notes: Runs at 4400 MT/s due to processor limitation.	32 GB (1x32 GB, 4800 MT/s) Notes: Runs at 4000 MT/s due to processor limitation.

Pre-Configured Models

Network Controller	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE Notes: No embedded networking	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	Embedded SATA controller (AHCI or Intel® SATA hybrid RAID controller)
Included Hard Drives	None shipped as standard, 8 SFF supported	None shipped as standard, 8 SFF supported	None shipped as standard, 12 LFF supported
Optical Drive	Optional DVD-ROM Optional via Universal Media Bay External support only	Optional DVD-ROM Optional via Universal Media Bay External support only	Not supported
Expansion Slots	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2-processor configuration		
Power Supply	P52560-B21 & P52560-291: 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P52561-B21 & P52561-291: 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit	P52562-B21 & P52562-291: 1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
	P52560-421: 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P52561-421: 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit	P52562-421: 1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit
Fans	4x Standard Fans		
Management	HPE iLO 6		
Rail Kit	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		
Security	TPM (Trusted Platform Module)		
Form Factor	2U Rack		
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.		

Pre-Configured Models

Product Overview	
SKU Number	P60740-AA1
Model Name	HPE ProLiant DL380 Gen11 4416+ 2.1GHz 20-core 1P 32GB-R MR408i-o NC 8SFF 800W PS Server
Chassis	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server
Processor	4416+ (20 core, 2.0 GHz, 165W)
Number of Processors	One with high-performance heatsink
Memory	32 GB (1x32 GB, 4800 MT/s) Notes: Runs at 4000 MT/s due to processor limitation.
Network Controller	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller
Included Hard Drives	None shipped as standard, 8 SFF supported
Optical Drive	Optional DVD-ROM Optional via Universal Media Bay External support only
Expansion Slots	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2-processor configuration
Power Supply	1x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fans	4x Standard Fans
Management	HPE iLO 6
Rail Kit	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit
Security	TPM (Trusted Platform Module)
Form Factor	2U Rack
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.

Pre-Configured Models

HPE ProLiant DL380 Gen11			
Pre-Configured Models			
SKU Number	P70456-291 P70456-421	P70457-291 P70457-421	P70458-421
Model Name	P70456-291: HPE ProLiant DL380 Gen11 4509Y 2.6GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS JP Server	P70457-291: HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS JP Server	HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR416i-p NC 12LFF 1000W PS
	P70456-421: HPE ProLiant DL380 Gen11 4509Y 2.6GHz 8-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS EMEA Server	P70457-421: HPE ProLiant DL380 Gen11 4514Y 2.0GHz 16-core 1P 32GB-R MR408i-o NC 8SFF 1000W PS EMEA Server	EMEA Server
Chassis	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server	HPE ProLiant DL380 Gen11 12LFF NC Configure-to-order Server
Processor	4509Y (8 core, 2.6 GHz, 125W)	4514Y (16 core, 2.0 GHz, 150W)	4514Y (16 core, 2.0 GHz, 150W)
Number of Processors	One		
Memory	32 GB (1x32 GB, 5600 MT/s) Notes: Runs at 4400 MT/s due to processor limitation.		
Network Controller	Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE Notes: No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE Notes: No embedded networking	Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE Notes: No embedded networking
Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller
Included Hard Drives	None shipped as standard, 8 SFF supported	None shipped as standard, 8 SFF supported	None shipped as standard, 12 LFF supported
Optical Drive	Optional DVD-ROM Optional via Universal Media Bay External support only		
Expansion Slots	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2-processor configuration		
Power Supply	1x HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit		
Fans	4x Standard Fans		
Management	HPE iLO 6		
Rail Kit	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit		

Pre-Configured Models

Security	TPM (Trusted Platform Module)
Form Factor	2U Rack
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.

Pre-Configured Models

Product Overview	
SKU Number	P70579-D61
Model Name	HPE ProLiant DL380 Gen11 6430 2.1GHz 32-core 1P 32GB-R NC 8SFF 800W PS Server
Chassis	HPE ProLiant DL380 Gen11 8SFF NC Configure-to-order Server
Processor	6430 (32 core, 2.1 GHz, 270W)
Number of Processors	One with high-performance heatsink
Memory	32 GB (1x32 GB, 4800 MT/s) Notes: Runs at 4400 MT/s due to processor limitation.
Network Controller	Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE Notes: No embedded networking
Storage Controller	Embedded SATA controller (AHCI or Intel® SATA hybrid RAID controller)
Included Hard Drives	None shipped as standard, 8 SFF supported
Optical Drive	Optional DVD-ROM Optional via Universal Media Bay External support only
Expansion Slots	3-slots (x8, x16, x8) as standard; upgradeable to 8-slots in a 2-processor configuration
Power Supply	2x HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit
Fans	6x High-performance Fan
Management	HPE iLO 6
Rail Kit	HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit
Security	TPM (Trusted Platform Module)
Form Factor	2U Rack
Warranty	Server warranty includes 3-year parts, 3-year labor, 3-year onsite support with next business day response.

Country Code Key

- -B21 = Worldwide
- -291 = Japan
- -421 = Europe, the Middle East and Africa
- -AA1 = China
- -D61 = India

Smart Templates from HPE

HPE is releasing new Smart Template technology in the One Config Advanced (OCA) configurator. These Templates represent the CTO equivalents of the top-selling BTO configurations. They are intended to provide simple starting points to assist you in easily creating and customizing your desired Server solutions. HPE Servers that have Platform Templates, developed by HPE Product Managers, will have a separate tab in the HPE OCA configurator.

Workload Solutions Templates from HPE

The Workload Solutions Templates are built on the Smart Templates technology to easily develop working configurations of the most compelling Workload Solutions. The templates complement the Reference Builds developed by HPE. Workload Solutions templates preconfigure some of the key architecture decisions and make it easier for Sellers to get started and complete a differentiated server solution for your customer's specific workload.

Mainstream SKUs

HPE launched the Mainstream SKU initiative as a market-driven approach to Demand Steering. It is a simplified portfolio of our top selling options that meet the current and future market trends. HPE has committed to providing a more predictable and faster experience for these options. Mainstream SKUs enjoy higher safety stock levels and have higher fulfilment service levels than non-Mainstream SKUs. Mainstream orders are fulfilled +30% faster than non-Mainstream orders, have fewer shortages and better recovery dates. This platform has Mainstream SKUs in the options portfolio, and is eligible for the improved Mainstream experience. Mainstream SKUs are designated with a Mainstream symbol in our configurators.

Mainstream Configurations

HPE is using the new Smart Templates technology to present Mainstream configurations. All the options in a Mainstream configuration are pre-selected Mainstream SKUs to optimize the performance, predictability and fulfilment experience. Check the Template section in our configurators for eligible Mainstream configurations.

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

- Factory Integrated Models must start with a CTO Server.
- FIO indicates that this option is only available as a factory installable option.
- All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.
- Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Configuration Information

Step 1: Base Configuration

(choose one (1) of the following four (4) configurable server models from the tables below)

The below (4) CTO server models, denoted with "NC" in the SKU description, provide flexibility in the networking choice and require a network adapter from the "HPE Networking" section be selected.

Networking Choice CTO Server Models	HPE ProLiant DL380 Gen11 8LFF NC CTO Server	HPE ProLiant DL380 Gen11 12LFF NC CTO Server	HPE ProLiant DL380 Gen11 8SFF NC CTO Server	HPE ProLiant DL380 Gen11 24SFF NC CTO Server			
SKU Number	P52532-B21	P52533-B21	P52534-B21	P52535-B21			
TAA SKU*	P52532-B21#GTA	P52533-B21#GTA	P52534-B21#GTA	P52535-B21#GTA			
HPE Trusted Supply Chain	P36394-B21 – Optional						
Processor	Not included as standard	Not included as standard	Not included as standard	Not included as standard			
DIMM Slots	32-DIMM slots	32-DIMM slots	32-DIMM slots	32-DIMM slots			
Storage Controller	Embedded SW RAID with 14 SATA ports (12-ports accessible), optional choice of HPE modular MegaRAID controller.						
PCIe	Three standard in primary riser						
Drive Cage - available	8LFF	12LFF	8 SFF (8SFF U.3 x1)	24SFF (3x 8SFF U.3 x1)			
Network Controller	Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters. Notes: No embedded networking						
Fans	4-Standard	4-Standard	4-Standard	6-High-performance			
Management	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional)						
USB	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port	4x 3.0 standard plus iLO front service port			
Networking Choice CTO Server Models	HPE ProLiant DL380 Gen11 12EDSFF NC Configure-to-order Server						
SKU Number	P52536-B21						
TAA SKU*	P52536-B21#GTA						
HPE Trusted Supply Chain	P36394-B21 – Optional						
Processor	Not included as standard						
DIMM Slots	32-DIMM slots						
Storage Controller	Embedded SW RAID with 14 SATA ports (12-ports accessible), and optional choice of HPE modular MegaRAID controller.						
PCIe	Three standard in primary riser						
Drive Cage - available	12 EDSFF						

Configuration Information

Network Controller	Choice of either OCP 3.0 or select stand-up network adapters for primary networking selection plus additional/optional stand-up network adapters
Fans	6 -Standard
Management	HPE iLO with Intelligent Provisioning (standard), iLO Advanced and OneView (optional)
USB	4x 3.0 standard plus iLO front service port

Notes:

- Network Choice (NC) server models require a networking selection of a network adapters in the “HPE Networking” section.
- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL380 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL380 Gen11 is re-branded as a HPE ProLiant DL380T Gen11 to denote the HPE Trusted Supply Chain security enhancements. The DL380T is Trade Agreement Act (TAA) compliant. See “HPE Security” section within this document for more detail and learn more at <https://www.hpe.com/security>
- *HPE offers multiple Trade Agreement Act (TAA) compliant configurations to meet the needs of US Federal Government customers. These products are either manufactured or substantially transformed in a designated country. TAA compliance is only provided when HPE options are included as part of factory integrated orders (CTO).
- All CTO servers are Energy Star 3.0 compliant.

Configuration Information

CTO Server	8 SFF CTO Chassis	24SFF CTO Chassis	8LFF CTO Chassis	12LFF CTO Chassis
Available Drive Cage	8SFF U.3 x1 Drive Cage	3x 8SFF U.3 x1 Drive Cage	8LFF (2x 4LFF Drive Cages)	12LFF (3x 4LFF Drive Cages)
Universal Media Bay	1 Optional	Not available	Not available	Not available
Optical Disk Drive	1 Optional with UMB	Not available	1 Optional with ODD Enable Kit	Not available
8 SFF NVMe/SAS/SATA Drive Cage (mid-tray)	1 Optional	1 Optional	1 Optional	1 Optional
2 SFF NVMe/SAS/SATA (Front)	1 Optional with UMB	Not available	1 Optional with Side-by-Side Drive Cage	Not available
2 SFF NVMe/SAS/SATA (Rear)	3 Optional	3 Optional	1 Optional	1 Optional
2LFF SAS/SATA (Rear riser)	Not available	Not available	2 Optional	2 Optional
CTO Server	EDSFF CTO Chassis			
Available Drive Cage	12 EDSFF Drive Cage			
Universal Media Bay	Not supported			
Optical Disk Drive	Not supported			
8 SFF NVMe/SAS/SATA Drive Cage	Up to 1 Optional			
2 SFF NVMe/SAS/SATA (Front)	Not supported			
2 SFF NVMe/SAS/SATA (Rear)	1 Optional			
2LFF SAS/SATA (Rear riser)	Not available			

Notes: This applies to CTO configurations; field upgrades may differ depending on field configuration.

Step 2: Choose Required Options

Please select the two processors required below (a maximum of two).

Notes:

- 8SFF, 8LFF, and 12LFF CTO models ship with 4 standard fans.
- 24SFF CTO Servers ship with 6 High-performance fans included. Maximum Performance fan kit is available to meet ambient temperature environments and are required for rear drives or NVMe configurations.
- Maximum memory capacity per processor is dependent on processor models. All processors support up to 4TB max memory per processor.
- Mixing of 2 different processor models are NOT allowed.
- Processors with TDP greater than 150W require High-performance Heatsink (P48818-B21).
- Q series processors require Max Performance Heat Sink (P48817-B21)
- DDR5 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

Configuration Information

Step 2a: Choose Processors**Processor Option Kits (Required Processor)****5th Generation Intel® Xeon®-Platinum**

All SKUs below ship with processors only. Adequate fans and heatsinks must be selected.

Supports "HPE DDR5 Smart Memory – Registered (RDIMM), 5600MT/s".

Intel® Xeon®-Platinum 8593Q 2.2GHz 64-core 385W Processor for HPE

P68449-B21

Notes:

- XCC die
- Max 2
- Qty 2 of processor must be selected.
- Max Performance Heat Sink or DLC Module must be selected
- High-performance Fan Kit must be selected and defaulted
- Max Performance Heat Sink is defaulted however customer is allowed to deselect and select DLC Module.
- Without DLC Module, drives above 11W cannot be populated in Rear Drive cages
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8592+ 1.9GHz 64-core 350W Processor for HPE

P67089-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected and defaulted
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8592V 2.0GHz 64-core 330W Processor for HPE

P67107-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected and defaulted
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8581V 2.0GHz 60-core 270W Processor for HPE

P67109-B21

Notes:

- XCC die
- Max 1
- High-performance Heat Sink must be selected.
- DLC Module cannot be selected.
- High-performance Fan Kit must be selected
- Cannot be selected with EDSFF CTO Server.
- Supports only PC5-5600B/ PC5-5200B Memory.

Configuration Information

Intel® Xeon®-Platinum 8580 2.0GHz 60-core 350W Processor for HPE

P67088-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8570 2.1GHz 56-core 350W Processor for HPE

P67087-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8568Y+ 2.3GHz 48-core 350W Processor for HPE

P67086-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8562Y+ 2.8GHz 32-core 300W Processor for HPE

P67085-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8558P 2.7GHz 48-core 350W Processor for HPE

P67108-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Platinum 8558 2.1GHz 48-core 330W Processor for HPE

P67097-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.

Configuration Information

Intel® Xeon®-Platinum 8558U 2.0GHz 48-core 300W Processor for HPE

P67102-B21

Notes:

- XCC die
- Max 1
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Single socket processor and DLC Module cannot be selected together.
- Cannot be selected with EDSFF CTO Server.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6558Q 3.2GHz 32-core 350W Processor for HPE

P67098-B21

Notes:

- MCC die
- Qty 2 of processor must be selected.
- Max Performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected
- Supports only PC5-5600B/ PC5-5200B Memory.
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.

Intel® Xeon®-Gold 6554S 2.2GHz 36-core 270W Processor for HPE

P67110-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6548N 2.8GHz 32-core 250W Processor for HPE

P67105-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6548Y+ 2.5GHz 32-core 250W Processor for HPE

P67082-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Configuration Information

Intel® Xeon®-Gold 6544Y 3.6GHz 16-core 270W Processor for HPE

P67084-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6542Y 2.9GHz 24-core 250W Processor for HPE

P67081-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6538N 2.1GHz 32-core 205W Processor for HPE

P67104-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6538Y+ 2.2GHz 32-core 225W Processor for HPE

P67096-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6534 3.9GHz 8-core 195W Processor for HPE

P67083-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 6530 2.1GHz 32-core 270W Processor for HPE

P67095-B21

Notes:

- XCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Configuration Information

Intel® Xeon®-Gold 6526Y 2.8GHz 16-core 195W Processor for HPE

P67080-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 5520+ 2.2GHz 28-core 205W Processor for HPE

P67094-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Gold 5515+ 3.2GHz 8-core 165W Processor for HPE

P67079-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Silver 4516Y+ 2.2GHz 24-core 185W Processor for HPE

P67093-B21

Notes:

- MCC die
- Max 2
- High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Intel® Xeon®-Silver 4514Y 2.0GHz 16-core 150W Processor for HPE

P67092-B21

Notes:

- MCC die
- Max 2
- Standard Heat Sink or High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.

Configuration Information

Intel® Xeon®-Silver 4510 2.4GHz 12-core 150W Processor for HPE

P67091-B21

Notes:

- EE LCC die
- Max 2
- Standard Heat Sink or High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- 96GB 5600B Memory cannot be selected.

Intel® Xeon®-Silver 4509Y 2.6GHz 8-core 125W Processor for HPE

P67090-B21

Notes:

- EE LCC die
- Max 2
- Standard Heat Sink or High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- If "HPE Energy Star4.0 configuration FIO kit" is selected then Qty2 of this Processor cannot be selected.
- 96GB 5600B Memory cannot be selected.

Intel® Xeon®-Bronze 3508U 2.1GHz 8-core 125W Processor for HPE

P67100-B21

Notes: 18, 282, 283, 284, 285, 288, 309, 319, 320, 322, 323, 430, 436, 499, 500, 501, 510

- EE LCC die
- Max 1
- Standard Heat Sink or High-performance Heat Sink or DLC Module must be selected.
- Standard Fan kit or High-performance Fan Kit must be selected.
- Supports only PC5-5600B/ PC5-5200B Memory.
- If "HPE Energy Star4.0 configuration FIO kit" is selected then Qty2 of this Processor cannot be selected.
- 96GB 5600B Memory cannot be selected.
- Supports PCIe4.0 Only29, 30, 31, 32, 34, 259, 445, 449, 458, 475, 499

4th Generation Intel® Xeon®-Platinum**Notes:**

- All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.
- Processors with TDP equal to or greater than 150W require High-performance Heatsink (P48818-B21)
- Q series processors require Max Performance Heat Sink (P48817-B21)
- 8470Q processor is not supported with 12LFF CTO Server and 24SFF CTO Server.

Intel® Xeon®-Platinum 9462 2.7GHz 32-core 350W Processor for HPE

P49645-B21

Notes:

- This is Intel High Bandwidth Memory (HBM) CPU.
- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8490H 1.9GHz 60-core 350W Processor for HPE

P49630-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Configuration Information

Intel® Xeon®-Platinum 8480+ 2.0GHz 56-core 350W Processor for HPE

P49607-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8470 2.0GHz 52-core 350W Processor for HPE

P49606-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8470N 1.7GHz 52-core 300W Processor for HPE

P49649-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8468 2.1GHz 48-core 350W Processor for HPE

P49605-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8462Y+ 2.8GHz 32-core 300W Processor for HPE

P49603-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8458P 2.7GHz 44-core 350W Processor for HPE

P49632-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8460Y+ 2.0GHz 40-core 300W Processor for HPE

P49604-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8452Y 2.0GHz 36-core 300W Processor for HPE

P49616-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Platinum 8444H 2.9GHz 16-core 270W Processor for HPE

P49625-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Configuration Information

4th Generation Intel® Xeon®-Gold

Intel® Xeon®-Gold 6448H 2.4GHz 32-core 250W Processor for HPE

P49622-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6448Y 2.1GHz 32-core 225W Processor for HPE

P49600-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6444Y 3.6GHz 16-core 270W Processor for HPE

P49602-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6442Y 2.6GHz 24-core 225W Processor for HPE

P49599-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6438N 2.0GHz 32-core 205W Processor for HPE

P49638-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6438Y+ 2.0GHz 32-core 205W Processor for HPE

P49615-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6434 3.7GHz 8-core 195W Processor for HPE

P49601-B21

Notes: Requires High-performance Heat Sink

Intel® Xeon®-Gold 6430 2.1GHz 32-core 270W Processor for HPE

P49614-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Intel® Xeon®-Gold 6426Y 2.5GHz 16-core 185W Processor for HPE

P49598-B21

Notes: Requires High-performance Heat Sink

Intel® Xeon®-Gold 6454S 2.2GHz 32-core 270W Processor for HPE

P49654-B21

Notes:

- Requires High-performance Heat Sink
- Requires High-performance Fan Kit

Configuration Information

Intel® Xeon®-Gold 6421N 1.8GHz 32-core 185W Processor for HPE	P49641-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Gold 6418H 2.1GHz 24-core 185W Processor for HPE	P49621-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Gold 6416H 2.2GHz 18-core 165W Processor for HPE	P49620-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE	P49597-B21
Notes: Requires Standard Heat Sink	
Intel® Xeon®-Gold 5416S 2.0GHz 16-core 150W Processor for HPE	P49653-B21
Notes: Requires Standard Heat Sink	
Intel® Xeon®-Gold 5418N 1.8GHz 24-core 165W Processor for HPE	P49640-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE	P49612-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Gold 5420+ 2.0GHz 28-core 205W Processor for HPE	P49613-B21
Notes:	
– Requires High-performance Heat Sink	
– Requires High-performance Fan Kit	
Intel® Xeon®-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE	P49597-B21
Notes:	
– Requires Standard Heat Sink	
– 4th Generation Intel® Xeon®-Silver	
Intel® Xeon®-Gold 5411N 1.9GHz 24-core 165W Processor for HPE	P49639-B21
Notes: Requires High-performance Heat Sink	
Intel® Xeon®-Silver 4410Y 2.0GHz 12-core 150W Processor for HPE	P49610-B21
Notes: Requires Standard Heatsink	
Intel® Xeon®-Silver 4416+ 2.0GHz 20-core 165W Processor for HPE	P49611-B21
Notes:	
– Requires Standard Heatsink	
– 4th Generation Intel® Xeon®-Bronze	
Intel® Xeon®-Bronze 3408U 1.8GHz 8-core 125W Processor for HPE	P49617-B21
Notes: Requires Standard Heatsink	

Configuration Information

Step 2b: Choose Memory Options

Please select one or more memory from below.

For new Gen11 memory population rule whitepaper and optimal memory performance guidelines, please go to:

[HPE Memory Population Rules](#)

For details on the HPE Server Memory Options Population Rules, please go to:

[Memory population rules for HPE Gen11 servers with 4th Generation Intel Scalable Processors](#)**Notes:**

- HPE Server Memory compatibility for a specific server platform may vary or be limited within a server platform depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for an HPE server model or family and yet occasionally not be supported with some configurations within that server family
- Memory should be installed in even quantity of DIMMs
- The maximum memory speed and capacity is a function of the memory type, memory configuration, and processor model.
- DDR5-4800 Memory Kits are only supported with 4th Generation Intel® Xeon® Scalable Series Processors.
- Memory compatibility may vary or be limited within a specific server family depending upon the specific configuration being requested. Because each server environment and requirements can vary, memory compatibility is based not only upon the server family, but may also be affected by the amount and type of additional hardware options installed within a specific server configuration. For this reason, some HPE memory DIMMs may be qualified for a server model or family and yet occasionally not be supported with limited configurations within that server family.
- Please consult with the HPE server QuickSpecs or your HPE representative if you have any questions regarding memory compatibility with a specific HPE server configuration.
- **96GB DIMMs supported only on XCC and MCC CPUs**

Registered DIMMs DDR5 (RDIMMs)

HPE 16GB (1x16GB) Single Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64705-B21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64706-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64707-B21
HPE 96GB (1x96GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P64708-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit	P64709-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR5-5600 CAS-52-45-45 EC8 Registered 3DS Smart Memory Kit	P64710-B21
HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43322-B21
HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43328-B21
HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	P43331-B21
HPE 96GB (1x96GB) Dual Rank x4 DDR5-4800 CAS-46-45-45 EC8 Registered Smart Memory Kit	P66675-B21
HPE 128GB (1x128GB) Dual Rank x4 DDR5-5600 CAS-46-45-45 EC8 Registered Smart Memory Kit	P69976-B21
HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43334-B21
HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	P43337-B21

Notes:

- **Memory should be installed in even quantity of DIMMs**
- If Memory Fault Tolerance is selected then only x4 memory options can be selected.

Configuration Information

- 4800 MT/s memory SKUs offer a transfer rate of 4800 MT/s at 1 DIMM per channel and 4400 MT/s at 2 DIMMs per channel
- Mixing of 3DS memory and non-3DS memory is not supported
- Mixing of x4 and x8 memory is not allowed
- Memory with larger than 96GB capacity will need High-performance Fan Kit (P48820-B21) and ambient limitation.
- 256GB DIMM will need to limit the maximum front-end cage to two.
- If 96GB or higher density memory is selected, then High-performance Fan Kit must be selected.
- 96GB memory cannot be mixed with any other memory.
- 96GB 5600 Memory cannot be selected with EE LCC (Edge Enhanced Low Core Count) die of the New 5th Generation Intel® Xeon® Scalable Processors.
- 96GB memory configuration must be either 8 or 16 only on 1 processor unit.
- 96GB memory configuration must be either 16 or 32 only on 2 processor unit.
- For 1 Processor, the allowed qty of 96GB 5600 Memory is 1, 6, 8, 12, 16 only.
- For 2 Processor, the allowed qty of 96GB 5600 Memory is 2, 12, 16, 24, 32 only.

Memory Blank Kit

HPE DDR4 DIMM Blank Kit

PO7818-B21

Notes: DIMM Blanks are optional and not required.**Step 2c: Choose Power Supplies**

Select one or two power supplies from below.

Notes: Mixing of 2 different power supplies is NOT allowed.**HPE Flex Slot Power Supplies**

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit

P44712-B21

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38997-B21

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit

P17023-B21

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit

P03178-B21

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38995-B21

Notes:

- Select a minimum (1), maximum (2) power supplies.
- 1600W Power supplies only support high line voltage (200VAC to 240VAC).
- Prior to making a power supply selection it is highly recommended that the HPE Power Advisor is run to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: <https://poweradvisorext.it.hpe.com/?Page=Index>.
- All power supplies in a server should match.
- Mixing Power Supplies is not supported.
- HPE ProLiant servers ship with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs). Visit [HPE power cords](#) for a full list of optional power cords.
- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single-output.
- HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

Step 3: Choose Additional Factory Integratable Options

One of the following from each list may be selected if desired at time of factory integration

HPE Security Options

HPE iLO Common Password FIO Setting

P08040-B21

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Bezel Lock Kit

875519-B21

Notes: This option can be selected only if HPE Gen11 2U Bezel Kit (P50400-B21) is selected.

HPE ProLiant DL3XX Gen11 Intrusion Cable Kit

P48922-B21

Notes: This option must be selected if HPE Trusted Supply Chain SKU (P36394-B21) is selected.

HPE Gen11 2U Bezel Kit

P50400-B21

Factory Instructions and Server Settings

HPE ProLiant DL380 Gen11 8NVMe 1P FIO Bundle Kit

P69548-B21

Notes:

- This bundle provides Direct Attach to 8NVMe Drives through First/ Single Processor
- If NVMe bundle is selected then defaulted Controller has to be deselected.
- If this NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit must be selected and defaulted.
- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High-Performance Fan Kit must be selected and defaulted.
- If 8NVMe Bundle is selected then Qty 1 (min/max) of 8SFF U.3 x4 cage OR 8SFF U.2 x4 cage must be selected.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 8SFF U.3 x1 Cage is selected along with 8 OR 16 NVMe bundle then controller must be selected except SR308i-o/SR308i-p.
- If 8NVMe 1P Bundle is selected then Primary 3 x16 Cable Kit cannot be selected and vice-versa.

HPE ProLiant DL380 Gen11 36EDSFF FIO Bundle Kit

P56075-B21

HPE ProLiant DL380 Gen11 20EDSFF FIO Bundle Kit

P56076-B21

Notes:

- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High-Performance Fan Kit must be selected.
- If NVMe Bundle/ EDSFF Bundle is selected then Second Processor must be selected.
- For 12EDSFF CTO Server, If EDSFF Bundle is selected then Max Quantity of 256GB Memory is limited to 16.
- EDSFF Drive cage supports Direct attach Only and requires selection of EDSFF Bundle.
- If EDSFF Bundle is selected then Qty1 of HPE DL380 Gen11 12EDSFF CPU1/2 Cable Kit must be selected
- If EDSFF Bundle is selected then Qty2 of HPE DL380/DL560 G11 2U 12EDSFF NVMe Kit must be selected.
- EDSFF Bundle is supported with 12EDSFF CTO Server Only.

Configuration Information

- If EDSFF Bundle is selected then OCP1 x16 Enablement Kit AND OCP2 x16 Enablement Kit AND CPU1 OCP2 x8 Enable kit cannot be selected.
- If EDSFF Bundle is selected then Tertiary Riser cannot be selected.
- If EDSFF Bundle is selected then HPE DL380 Gen11 x16/x16/x16 Prim Cable Kit AND HPE DL380 Gen11 x16/x16/x16 Sec Cable Kit cannot be selected.
- If 20EDSFF Bundle is selected then Maximum 20 EDSFF Drives only can be selected.

HPE ProLiant DL380 Gen11 32NVMe Balanced FIO Bundle Kit

P53639-B21

Notes:

- If NVMe bundle is selected then default storage controller cannot be selected.
- If this NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit must be selected.
- If this NVMe Bundle/ EDSFF Bundle is selected then Qty 1 of High-Performance Fan Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 3 (min/max) of 8SFF U.3 x4 cage must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 3x16 Primary riser must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 3x16 SEC Riser must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of OCP1 x16 Enablement Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of OCP2 x16 Enablement Kit must be selected.
- If 24NVMe Bundle/ 32NVMe Bundle is selected then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit must be selected.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If NVMe Bundle/ EDSFF Bundle is selected, then Second Processor must be selected.
- If 24NVMe/ 32NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- For 8SFF CTO Server, 8SFF U.3 x4 Mid Tray requires selection of 32NVMe Bundle or SR932i controller.
- If 32NVMe Bundle is selected, then Qty 1 (min/max) of HPE DL380 G11 2U 8SFF x4 U.3 Mid TM Kit must be selected.
- If 32NVMe Bundle is selected, then Qty 4 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter must be selected.

Configuration Information

HPE ProLiant DL380 Gen11 8NVMe Balanced FIO Bundle Kit

P53633-B21

Notes:

- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 8NVMe Bundle is selected, then Qty 1 (min) of 8SFF U.3 x4 drive must be selected.
- If NVMe Bundle is selected, then 8SFF U.3 x4 Cage is defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 8SFF U.3 x1 Cage is selected along with 8 OR 16 NVMe bundle, then controller must be selected.

HPE ProLiant DL380 Gen11 16NVMe Balanced FIO Bundle Kit

P53634-B21

Notes:

- If NVMe bundle is selected, then defaulted Controller must be deselected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 16NVMe Bundle is selected, then Qty 2 (min) of 8SFF U.3 x4 drive cage must be selected.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If Tertiary Riser is selected along with 16NVMe Bundle, then 2x16 Tertiary FIO x8 Enable Kit (P53632-B21) must be selected
- If 8SFF U.3 x1 drive cage (P48813-B21) is selected along with 8 OR 16 NVMe bundle, then controller must be selected.

HPE ProLiant DL380 Gen11 24NVME Balanced I/O FIO Bundle Kit

P53635-B21

Notes:

- If NVMe bundle is selected, then defaulted Controller must be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drives must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Secondary Riser (P51083-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP2 x16 Enablement Kit (P48828-B21) must be selected and defaulted.

Configuration Information

- If 24NVMe Bundle is selected, then Qty 2 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Balanced or 24NVMe DIFF IO-3 Bundle is selected, then CPU1 OCP2 x8 enablement OR CPU2 OCP2 x8 enablement kit cannot be selected.
- If 24NVMe Bundle is selected, then Primary 3 x16 Cable OR Secondary 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1/2 x8 FIO Bundle Kit

P53636-B21

Notes:

- If NVMe bundle is selected, then defaulted Controller must be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P48802-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL300 Gen11 CPU1 OCP2 x8 Enable kit (P51911-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If Tertiary Riser is selected along with 16NVMe Bundle then 2x16 Tertiary FIO x8 Enable Kit (P53632-B21) must be selected
- If 24NVMe Diff IO-1 bundle is selected, then OCP1 x16 enablement Kit and OCP2 x16 enablement kit and CPU2 OCP2 x8 enablement Kit cannot be selected.
- If 24NVMe Bundle is selected then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1 x16 FIO Bundle Kit

P53637-B21

Notes:

- If NVMe bundle is selected, then defaulted Controller must be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.

Configuration Information

- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P48802-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.
- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Diff IO-2 bundle is selected, then OCP2 x16 enablement kit and CPU2 OCP2 enablement Kit OR CPU1 OCP2 x8 enablement Kit OR OCP2 x16 enablement cannot be selected.
- If 24NVMe Bundle is selected, then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE ProLiant DL380 Gen11 24NVME Differential I/O OCP1/2 x16 FIO Bundle Kit

P53638-B21

Notes:

- If NVMe bundle is selected, then defaulted Controller must be deselected.
- If NVMe Bundle is selected, then 8SFF U.3 x1 drive cage (P48813-B21) cannot be selected.
- If this NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 8NVMe CPU1/2 Cable Kit (P48825-B21) must be selected and defaulted.
- If this NVMe Bundle is selected, then Qty 1 of High-Performance Fan Kit (P48820-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 3 (min) of 8SFF U.3 x4 drive cage must be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary Riser (P48803-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 x8x16x8 Secondary Riser (P51083-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP1 x16 Enablement Kit (P48827-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of OCP2 x16 Enablement Kit (P48828-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 2 of HPE DL385 Gen10+ 12Gb NVMe 2p Adapter (P25527-B21) must be selected and defaulted.
- If 24NVMe Bundle is selected, then Qty 1 of HPE Gen4 Re-timer/-p Cable Kit (P54874-B21) must be selected and defaulted.
- If NVMe Bundle is selected, then 8SFF U.3 x4 drive cage will be defaulted.

Configuration Information

- NVMe Bundle is supported with 8SFF CTO Server Only.
- If 16NVMe/ 24NVMe Bundle is selected, then Universal Media Bay kit cannot be selected.
- If NVMe Bundle is selected, then Second Processor must be selected.
- If 24NVMe Bundle is selected, then Tertiary Riser cannot be selected.
- If 24NVMe Balanced or 24NVMe DIFF IO-3 Bundle is selected, then CPU1 OCP2 x8 enablement OR CPU2 OCP2 x8 enablement kit cannot be selected
- If 24NVMe Bundle is selected, then primary 3 x16 Cable OR Sec 3 x16 Cable cannot be selected.

HPE iLO Common Password FIO Setting

P08040-B21

Notes: Sets common iLO password, instead of randomly generated password for each server during Factory Diagnostics.

HPE ProLiant Platform Certificate and IDevID iLO FIO Setting

P42104-B21

Notes:

- Initial Device Identity (IDevID) certificates are part of a Zero Trust Architecture. This SKU instructs factory to provision IDevID on HPE iLO.
- Directs HPE manufacturing site to create, digitally sign and store a platform certificate on the server.
- Requires HPE Trusted Platform Module (TPM).

HPE Converged Infrastructure Management Software

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU

P8B26AAE

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU

E5Y35AAE

vSAN ReadyNode

- 3, 6, 8 or 16 node vSAN Clusters (3 node minimum)
- HW is optimized for vSAN
- VMware vSAN Advanced LTU bundled

Step 4: Choose additional options for Factory Integration from Core and Additional Options sections below

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

Software as a Service Management

HPE Compute Ops Management

Base SKU

HPE Compute Ops Management Standard 3-year Upfront ProLiant SaaS R7A11AAE

Upgrade SKUs

HPE Compute Ops Management Advanced Flex with ProLiant Enablement S6C28AAE

HPE Compute Ops Management Standard 1-year Upfront ProLiant SaaS R7A10AAE

HPE Compute Ops Management Standard 5-year Upfront ProLiant SaaS R7A12AAE

HPE Compute Ops Management Advanced 1-year Upfront ProLiant SaaS S5E58AAE

HPE Compute Ops Management Advanced 3-year Upfront ProLiant SaaS S5E59AAE

HPE Compute Ops Management Advanced 5-year Upfront ProLiant SaaS S5E60AAE

HPE Compute Ops Management Advanced 7-year Upfront ProLiant SaaS S5E61AAE

HPE OneView

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU P8B26AAE

Notes: For customers purchasing HPE Compute Ops Management, without a hardware purchase or a BTO purchase, use this base SKU within ASQ order:

HPE Compute Ops Management Base SaaS R6Z73AAE

For more information, visit the Compute Ops Management QuickSpecs:

<https://www.hpe.com/psnow/doc/a50004263enw>

Supported Servers – CTO only. No OEM. – Complete list can be found here: Latest Supported Server List:

<https://www.hpe.com/info/com-supported-servers>

HPE Unique Options

HPE ProLiant DL380 Gen11 12EDSFF Drive Cage Kit P48808-B21

Notes:

- This is the 12EDSFF drive cage.
- This drive cages holds a maximum of 12 single thickness EDSFF drives
- Available for Factory Install Only orders and not available for standalone or upgrade ordering.

HPE ProLiant DL380 Gen11 2SFF U.3 Primary/Secondary Riser Cage Kit P48810-B21

Notes:

- 2SFF drive cage for rear in Primary or Secondary riser position.
- This Drive cage can be selected with 8SFF CTO Server and 24SFF CTO Server Only.
- For 8SFF/ 24SFF CTO Server, Max = 2.

Core Options

HPE ProLiant DL380 Gen11 2SFF U.3 HDD Stacking Drive Cage Kit

P48811-B21

Notes:

- This is a 2SFF drive cage for front or rear. For a front mount it is installed into Universal Media Bay.
- This drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe Drives only
- For 8SFF CTO Server, Max = 2.

HPE ProLiant DL380 Gen11 2SFF U.3 Side-by-Side Drive Cage Kit

P48812-B21

Notes:

- This is 2SFF side-by-side drive cage for the 8LFF CTO server only.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe drives only.
- Max = 1

HPE ProLiant DL380 Gen11 2U 8SFF x1 Tri-Mode U.3 Drive Cage Kit

P48813-B21

Notes:

- This is an 8SFF U.3 x1 front drive cage.
- This drive cage can be selected with 8SFF CTO Server Only.
- Max = 3
- If Qty3 of 8SFF Front cage is selected then High-Performance Fan Kit (P48820-B21) must be selected.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support SATA Drives only and connects to SATA port on motherboard.

HPE ProLiant DL380 Gen11 8SFF U.3 Premium Drive Cage Kit

P48814-B21

Notes:

- This is an 8SFF U.3 x4 front drive cage.
- This Drive cage can be selected with 8SFF CTO Server Only.
- Max = 3
- If Qty3 is selected then High-Performance Fan Kit (P48820-B21) must be selected.
- This drive cage supports controller and Direct Attach. If Direct Attached then it will support NVMe Drives only.

HPE ProLiant DL380 Gen11 4LFF SAS/SATA 12G LP Midplane Drive Cage Kit

P48809-B21

Notes:

- This is the 4LFF mid-tray drive cage.
- This drive cage holds a maximum of 4LFF drives.
- Max 16LFF SAS/SATA is possible when storage controller is selected
- Max 14LFF SATA is possible if mid-tray is direct connected to motherboard

HPE ProLiant DL380 Gen11 8SFF x1 Tri-Mode 24G U.3 BC Midplane Drive Cage Kit

P48815-B21

Notes:

- This is the 8SFF U.3 x1 mid-tray drive cage.
- This drive cage holds a maximum of 8 SAS/SATA/NVMe drives.

HPE ProLiant DL380 Gen11 2U 8SFF x4 U.3 Mid Tray Tri-Mode Drive Cage Kit

P48816-B21

Notes:

- This is the 8SFF U.3 x4 mid-tray drive cage.
- This drive cage holds a maximum of 8 SAS/SATA/NVMe drives.

Core Options

HPE ProLiant DL380 Gen11 2LFF Primary Riser Cage Kit

P48823-B21

Notes:

- This is a 2LFF drive cage for the rear Primary Riser position.
- This Drive cage supports controller and Direct Attach. If Direct Attached then it will support SATA Drives only and connects to SATA port on motherboard.
- Max = 1
- This drive cage can be selected with 8LFF CTO Server and 12LFF CTO Server Only.

HPE ProLiant DL380 Gen11 2LFF Tertiary Riser Cage Kit

P48826-B21

Notes:

- This is a 2LFF drive cage for the rear Secondary + Tertiary Riser position.
- Max = 1

HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit

P50728-B21

Notes:

- This is the Universal Media Bay, it occupies an 8SFF drive cage slot on the front of the 8SFF CTO server.
- The Universal Media Bay can be selected with the 8SFF CTO Server only.

HPE ProLiant DL380 Gen11 2LFF LP Secondary Riser Cage Kit

P51095-B21

Notes:

- This is a 2LFF drive cage for the rear Primary Riser position.
- Max = 1
- This drive cage can be selected with 8LFF CTO Server and 12LFF CTO Server Only.

HPE ProLiant DL380/DL560 Gen11 2U High-performance Fan Kit

P48820-B21

Notes:

- If Processor above 205W is selected then High-Performance Fan Kit is required.
- If 128GB or higher memory is selected then High-Performance Fan Kit is required.
- If quantity three of front drive cage is selected, then High-performance Fan Kit is required.
- If NVMe is selected, then High-performance Fan Kit is required.
- 24SFF CTO server comes with High-performance Fan Kit installed.

HPE ProLiant DL380 Gen11 Max Performance Heat Sink Kit

P48817-B21

Notes:

- If Q Series Processor is selected then Max Performance Heat Sink is required.
- Max = 1

HPE ProLiant DL380/DL560 Gen11 High-performance 2U Heat Sink Kit

P48818-B21

Notes:

- If Processor above 150W is selected then High-Performance Heat Sink is required.
- Number of Heat Sinks selected must match number of processor(s) selected.

HPE ProLiant DL3XX/560 Gen11 High-performance Heat Sink Kit

P48905-B21

Notes: This is a low-profile high-performance heatsink; this is only used when storage mid-tray is selected.

HPE ProLiant DL380 Gen11 Standard Heat Sink Kit

P49145-B21

Notes: Standard heatsink is for CPUs with 150W or lower TDP.

HPE ProLiant DL380/DL560 Gen11 2U Rear Serial Port Cable Kit

P48824-B21

HPE ProLiant DL380 Gen11 System Insight Display Kit

P48819-B21

Notes: Max = 1

HPE ProLiant DL380 Compute Gen11 2U 8-pin GPU Power Cable Kit

P77896-B21

Notes: Quantity of one of can support up to 5 Single-wide GPUs.

HPE Processors

Processor Option Kits

5th Generation Intel® Xeon®-Platinum

All SKUs below ship with processors only. Adequate fans and heatsinks must be selected.

Supports "HPE DDR5 Smart Memory – Registered (RDIMM), 5600MT/s".

Intel® Xeon®-Platinum 8593Q 2.2GHz 64-core 385W Processor for HPE

P68449-B21

Notes:

- XCC die
- Max 2
- Requires selection of Max Performance Heat Sink or DLC Module.

Intel® Xeon®-Platinum 8592+ 1.9GHz 64-core 350W Processor for HPE

P67089-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8592V 2.0GHz 64-core 330W Processor for HPE

P67107-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8581V 2.0GHz 60-core 270W Processor for HPE

P67109-B21

Notes:

- XCC die
- Max 1

Intel® Xeon®-Platinum 8580 2.0GHz 60-core 350W Processor for HPE

P67088-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8570 2.1GHz 56-core 350W Processor for HPE

P67087-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8568Y+ 2.3GHz 48-core 350W Processor for HPE

P67086-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8562Y+ 2.8GHz 32-core 300W Processor for HPE

P67085-B21

Notes:

- MCC die
- Max 2

Core Options

Intel® Xeon®-Platinum 8558P 2.7GHz 48-core 350W Processor for HPE

P67108-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8558 2.1GHz 48-core 330W Processor for HPE

P67097-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Platinum 8558U 2.0GHz 48-core 300W Processor for HPE

P67102-B21

Notes:

- XCC die
- Max 1

Intel® Xeon®-Gold 6558Q 3.2GHz 32-core 350W Processor for HPE

P67098-B21

Notes:

- MCC die
- Max 2
- **Requires selection of Max Performance Heat Sink or DLC Module**

Intel® Xeon®-Gold 6554S 2.2GHz 36-core 270W Processor for HPE

P67110-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Gold 6548N 2.8GHz 32-core 250W Processor for HPE

P67105-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6548Y+ 2.5GHz 32-core 250W Processor for HPE

P67082-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6544Y 3.6GHz 16-core 270W Processor for HPE

P67084-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6542Y 2.9GHz 24-core 250W Processor for HPE

P67081-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6538N 2.1GHz 32-core 205W Processor for HPE

P67104-B21

Notes:

- MCC die
- Max 2

Core Options

Intel® Xeon®-Gold 6538Y+ 2.2GHz 32-core 225W Processor for HPE

P67096-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6534 3.9GHz 8-core 195W Processor for HPE

P67083-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 6530 2.1GHz 32-core 270W Processor for HPE

P67095-B21

Notes:

- XCC die
- Max 2

Intel® Xeon®-Gold 6526Y 2.8GHz 16-core 195W Processor for HPE

P67080-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 5520+ 2.2GHz 28-core 205W Processor for HPE

P67094-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Gold 5515+ 3.2GHz 8-core 165W Processor for HPE

P67079-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Silver 4516Y+ 2.2GHz 24-core 185W Processor for HPE

P67093-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Silver 4514Y 2.0GHz 16-core 150W Processor for HPE

P67092-B21

Notes:

- MCC die
- Max 2

Intel® Xeon®-Silver 4510 2.4GHz 12-core 150W Processor for HPE

P67091-B21

Notes:

- EE LCC die
- Max 2
- If this Processor is selected, then 96GB 5600B Memory cannot be selected.

Intel® Xeon®-Silver 4509Y 2.6GHz 8-core 125W Processor for HPE

P67090-B21

Notes:

- EE LCC die
- Max 2
- If this Processor is selected, then 96GB 5600B Memory cannot be selected.

Core Options

Intel® Xeon®-Bronze 3508U 2.1GHz 8-core 125W Processor for HPE

P67100-B21

Notes:

- EE LCC die
- Max 1
If this Processor is selected, then 96GB 5600B Memory cannot be selected.
- Supports PCIe4.0 Only

4th Generation Intel® Xeon®-Platinum**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel® Xeon®-Platinum 9462 2.7GHz 32-core 350W Processor for HPE

P49645-B21

Notes: This is Intel High Bandwidth Memory (HBM) CPU.

Intel® Xeon®-Platinum 8490H 1.9GHz 60-core 350W Processor for HPE

P49630-B21

Intel® Xeon®-Platinum 8480+ 2.0GHz 56-core 350W Processor for HPE

P49607-B21

Intel® Xeon®-Platinum 8470 2.0GHz 52-core 350W Processor for HPE

P49606-B21

Intel® Xeon®-Platinum 8470N 1.7GHz 52-core 300W Processor for HPE

P49649-B21

Intel® Xeon®-Platinum 8468 2.1GHz 48-core 350W Processor for HPE

P49605-B21

Intel® Xeon®-Platinum 8458P 2.7GHz 44-core 350W Processor for HPE

P49632-B21

Intel® Xeon®-Platinum 8460Y+ 2.0GHz 40-core 300W Processor for HPE

P49604-B21

Intel® Xeon®-Platinum 8452Y 2.0GHz 36-core 300W Processor for HPE

P49616-B21

Intel® Xeon®-Platinum 8444H 2.9GHz 16-core 270W Processor for HPE

P49625-B21

4th Generation Intel® Xeon®-Gold**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel® Xeon®-Gold 6448H 2.4GHz 32-core 250W Processor for HPE

P49622-B21

Intel® Xeon®-Gold 6448Y 2.1GHz 32-core 225W Processor for HPE

P49600-B21

Intel® Xeon®-Gold 6444Y 3.6GHz 16-core 270W Processor for HPE

P49602-B21

Intel® Xeon®-Gold 6442Y 2.6GHz 24-core 225W Processor for HPE

P49599-B21

Intel® Xeon®-Gold 6438N 2.0GHz 32-core 205W Processor for HPE

P49638-B21

Intel® Xeon®-Gold 6438Y+ 2.0GHz 32-core 205W Processor for HPE

P49615-B21

Intel® Xeon®-Gold 6434 3.7GHz 8-core 195W Processor for HPE

P49601-B21

Intel® Xeon®-Gold 6430 2.1GHz 32-core 270W Processor for HPE

P49614-B21

Intel® Xeon®-Gold 6454S 2.2GHz 32-core 270W Processor for HPE

P49654-B21

Intel® Xeon®-Gold 6426Y 2.5GHz 16-core 185W Processor for HPE

P49598-B21

Notes: Single socket capable, no dual socket support.

Intel® Xeon®-Gold 6421N 1.8GHz 32-core 185W Processor for HPE

P49641-B21

Intel® Xeon®-Gold 6418H 2.1GHz 24-core 185W Processor for HPE

P49621-B21

Intel® Xeon®-Gold 6416H 2.2GHz 18-core 165W Processor for HPE

P49620-B21

Intel® Xeon®-Gold 5415+ 2.9GHz 8-core 150W Processor for HPE

P49597-B21

Intel® Xeon®-Gold 5416S 2.0GHz 16-core 150W Processor for HPE

P49653-B21

Intel® Xeon®-Gold 5418N 1.8GHz 24-core 165W Processor for HPE

P49640-B21

Intel® Xeon®-Gold 5418Y 2.0GHz 24-core 185W Processor for HPE

P49612-B21

Intel® Xeon®-Gold 5420+ 2.0GHz 28-core 205W Processor for HPE

P49613-B21

Intel® Xeon®-Gold 5411N 1.9GHz 24-core 165W Processor for HPE

P49639-B21

4thGeneration Intel® Xeon®-Silver**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel® Xeon®-Silver 4410Y 2.0GHz 12-core 150W Processor for HPE

P49610-B21

Intel® Xeon®-Silver 4416+ 2.0GHz 20-core 165W Processor for HPE

P49611-B21

4thGeneration Intel® Xeon®-Bronze**Notes:** All SKUs below ship with processor only. Adequate fans and heatsinks must be selected.

Intel® Xeon®-Bronze 3408U 1.8GHz 8-core 125W Processor for HPE

P49617-B21

HPE Optical Drives

HPE 9.5mm SATA DVD-ROM Optical Drive

726536-B21

Notes: HPE DL38X Gen11 Universal Media Bay Kit (P50728-B21) is required for this option on a SFF model. Not supported in 12LFF or 24SFF models.

HPE 9.5mm SATA DVD-RW Optical Drive

726537-B21

Notes: HPE DL38X Gen11 Universal Media Bay Kit (P50728-B21) is required for this option on a SFF model. Not supported in 12LFF or 24SFF models.

HPE Mobile USB DVD-RW Optical Drive

701498-B21

Notes: This is only supported on USB 3.0 ports.**Media Bay Kits**

HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit

P50728-B21

Notes:

- The HPE DL380 Gen11 Universal Media Bay provides front DisplayPort and 2xUSB 2.0; plus support for 2x SFF front drives or 2 NVME front drives (riser required) and ODD support (Not included); and can only be located in Box1 in either an 8 SFF or 8+8 SFF model.
- This is a SFF model option only.
- Not supported on 12EDSFF, 24SFF, 12FF, or 8LFF CTO servers.

HPE Hard Disk Drives**Mission Critical – 12G SAS – SFF Drives**

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3yr Warranty 512e FIPS 140-2 TAA-compliant HDD

P28618-B21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3yr Warranty FIPS 140-2 TAA-compliant HDD

P28622-B21

Enterprise – 12G SAS – SFF Drives

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD

P28352-B21

HPE 1.8TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD

P53562-B21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P28586-B21

HPE 600GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P53561-B21

HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD

P40430-B21

Midline – 12G SAS – LFF Drives

HPE 24TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P68583-B21
HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53553-B21
HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23608-B21
HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881781-B21
HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834031-B21
HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861746-B21
HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833928-B21
HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	833926-B21

Midline – 6G SATA – LFF Drives

HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P53554-B21
HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD	P23449-B21
HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD	881787-B21
HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	834028-B21
HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD	861742-B21
HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861683-B21
HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861681-B21
HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD	861686-B21

SSD Selection

For SSD selection guidance, please visit <https://ssd.hpe.com/>

Read Intensive – NVMe – EDSFF – Solid State Drives

HPE 30.72TB NVMe Gen5 High-Performance Read Intensive E3.S EC1 EDSFF SPDM 9550 SSD	P79965-B21
HPE 15.36TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61187-B21
HPE 15.36TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57807-B21
HPE 7.68TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57803-B21
HPE 7.68TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61183-B21
HPE 7.68TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57803-B21
HPE 3.84TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM CM7 SSD	P61179-B21
HPE 3.84TB NVMe Gen5 High-performance Read Intensive E3S EC1 EDSFF SPDM PM1743 SSD	P57799-B21
HPE 3.84TB NVMe Gen5 High-performance Read Intensive E3S EC1 PS1010 SSD	P70392-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69234-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69237-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69239-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 CD8P SSD	P69546-B21
HPE 1.92TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77269-B21
HPE 3.84TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77271-B21
HPE 7.68TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77273-B21
HPE 15.36TB NVMe Gen5 Mainstream Performance Read Intensive E3S EC1 EDSFF SPDM PE1010 SSD	P77275-B21
HPE 15.36TB NVMe Gen5 High-performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P79122-B21
HPE 30.72TB NVMe Gen4 Mainstream Performance Very Read Optimized E3S EC1 EDSFF P5430 SSD	P79065-B21

Mixed Use – NVMe – EDSFF – Solid State Drives

HPE 6.4TB NVMe Gen5 High-performance Mixed Use E3S EC1 PS1030 SSD	P70401-B2
HPE 12.8TB NVMe Gen5 High-performance Mixed Use E3S EC1 PS1030 SSD	P70403-B21

Core Options

HPE 3.2TB NVMe Gen5 High-performance Mixed Use E3S EC1 PS1030 SSD	P70399-B21
HPE 3.2TB NVMe Gen5 High-performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61191-B21
HPE 6.4TB NVMe Gen5 High-performance Mixed Use E3S EC1 EDSFF SPDM CM7 SSD	P61195-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69241-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69243-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 CD8P SSD	P69245-B21
HPE 1.6TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77262-B21
HPE 3.2TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77265-B21
HPE 6.4TB NVMe Gen5 Mainstream Performance Mixed Use E3S EC1 EDSFF SPDM PE1030 SSD	P77267-B21
HPE 3.2TB NVMe Gen5 High-performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70669-B21
HPE 6.4TB NVMe Gen5 High-performance Mixed Use E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70672-B21
HPE 7.68TB NVMe Gen5 High-performance Read Intensive E3S EC1 Self-encrypting FIPS 140-3 CM7 SSD	P70674-B21

Read Intensive – SAS – SFF – Solid State Drives

HPE 7.68TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63879-B21
HPE 15.36TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49045-B21
HPE 3.84TB SAS Read Intensive SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63875-B21
HPE 7.68TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49041-B21
HPE 3.84TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49035-B21
HPE 1.92TB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49031-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21
HPE 7.68TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40509-B21
HPE 3.84TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40508-B21
HPE 1.92TB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40507-B21
HPE 960GB SAS 12G Read Intensive SFF BC Value SAS Multi Vendor SSD	P40506-B21
HPE 960GB SAS 24G Read Intensive SFF BC Multi Vendor SSD	P49029-B21

Mixed Use –SAS – SFF – Solid State Drives

HPE 1.6TB SAS Mixed Use SFF BC Self-encrypting FIPS 140-2 PM7 SSD	P63871-B21
HPE 6.4TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49057-B21
HPE 3.2TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49053-B21
HPE 1.6TB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49049-B21
HPE 800GB SAS 24G Mixed Use SFF BC Multi Vendor SSD	P49047-B21
HPE 3.84TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40512-B21
HPE 1.92TB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40511-B21
HPE 960GB SAS 12G Mixed Use SFF BC Value SAS Multi Vendor SSD	P40510-B21

Read Intensive – 6G SATA – SFF – Solid State Drives

HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	P63886-B21
HPE 480GB SATA 6G Read Intensive SFF BC PM893a SSD	P63886-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	P63910-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC PM893a SSD	P63910-B21
HPE 7.68TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40501-B21
HPE 3.84TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40500-B21
HPE 1.92TB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40499-B21
HPE 480GB SATA 6G Read Intensive SFF BC Self-encrypting 5400P SSD	P58236-B21
HPE 480GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40497-B21

Core Options

HPE 960GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40498-B21
HPE 240GB SATA 6G Read Intensive SFF BC Multi Vendor SSD	P40496-B21
Mixed Use – 6G SATA – SFF – Solid State Drives	
HPE 3.84TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40505-B21
HPE 1.92TB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40504-B21
HPE 960GB SATA 6G Mixed Use SFF BC Self-encrypting 5400M SSD	P58244-B21
HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40503-B21
HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD	P40502-B21
Mixed Use – 12G SAS – LFF –Solid State Drives	
HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD	P37009-B21
Read Intensive – 6G SATA – LFF – Solid State Drives	
HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD	P47808-B21
Read Intensive – NVMe – SFF – Solid State Drives	
HPE 15.36TB NVMe Gen5 High-performance Read Intensive E3S EC1 PS1010 SSD	P70397-B21
HPE 7.68TB NVMe Gen5 High-performance Read Intensive E3S EC1 PS1010 SSD	P70395-B21
HPE 15.36TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PS1010 SSD	P70436-B21
HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 SPDM 7500b SSD	P84239-B21
HPE 15.36TB NVMe Gen4 Mainstream Performance Read Intensive BC U.3 Static V2 SPDM Multi Vendor SSD	P84236-B21
HPE 15.36TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 CM7 SSD	P63841-B21
HPE 7.68TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PM1733 SSD	P40567-B21
HPE 15.36TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PM1733a SSD	P50224-B21
HPE 7.68TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PS1010 SSD	P70434-B21
HPE 7.68TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 CM7 SSD	P63837-B21
HPE 7.68TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64848-B21
HPE 7.68TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PM1733a SSD	P50222-B21
HPE 3.84TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 CM7 SSD	P63833-B21
HPE 3.84TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64846-B21
HPE 3.84TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PM1733a SSD	P50219-B21
HPE 1.92TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 CM7 SSD	P63829-B21
HPE 1.92TB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64844-B21
HPE 1.92TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 PM1733a SSD	P50216-B21
HPE 960GB NVMe Gen4 Mainstream Performance Read Intensive SFF BC U.3 Static V2 Multi Vendor SSD	P64842-B21
HPE 1.92TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61019-B21
HPE 3.84TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61027-B21
HPE 7.68TB NVMe Gen4 High-performance Read Intensive SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61035-B21
Mixed Use – NVMe – SFF – Solid State Drives	
HPE 6.4TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 PS1030 SSD	P70428-B21
HPE 6.4TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 CM7 SSD	P63853-B21
HPE 6.4TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65023-B21
HPE 6.4TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 PM1735a SSD	P50233-B21
HPE 3.2TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 PS1030 SSD	P70426-B21
HPE 3.2TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 CM7 SSD	P63849-B21

Core Options

HPE 3.2TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65015-B21
HPE 3.2TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 PM1735a SSD	P50230-B21
HPE 1.6TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 CM7 SSD	P63845-B21
HPE 1.6TB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P65007-B21
HPE 1.6TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 PM1735a SSD	P50227-B21
HPE 800GB NVMe Gen4 Mainstream Performance Mixed Use SFF BC U.3 Static V2 Multi Vendor SSD	P64999-B21
HPE 1.6TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61043-B21
HPE 3.2TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61051-B21
HPE 6.4TB NVMe Gen4 High-performance Mixed Use SFF BC U.3 Self-encrypting FIPS 140-3 CM7 SSD	P61059-B21

Hard Drive Blank Kits

HPE Gen9 LFF HDD Spade Blank Kit	807878-B21
HPE Small Form Factor Hard Drive Blank Kit	666987-B21

Hard Drive Cage Kits

HPE ProLiant DL380 Gen11 12EDSFF Drive Cage Kit	P48808-B21
---	------------

Notes: Currently available as Factory Install Only and not available for standalone or upgrade ordering.

HPE ProLiant DL380 Gen11 2U 8SFF x1 Tri-Mode U.3 Drive Cage Kit	P48813-B21
HPE ProLiant DL380 Gen11 8SFF U.3 Premium Drive Cage Kit	P48814-B21
HPE ProLiant DL380 Gen11 SFF Universal Media Bay Kit	P50728-B21
HPE ProLiant DL380 Gen11 2SFF U.3 HDD Stacking Drive Cage Kit	P48811-B21
HPE ProLiant DL380 Gen11 2SFF U.3 Side-by-Side Drive Cage Kit	P48812-B21
HPE ProLiant DL380 Gen11 2SFF U.3 Primary/Secondary Riser Cage Kit	P48810-B21
HPE ProLiant DL380 Gen11 8SFF x1 Tri-Mode 24G U.3 BC Midplane Drive Cage Kit	P48815-B21
HPE ProLiant DL380 Gen11 2U 8SFF x4 U.3 Mid Tray Tri-Mode Drive Cage Kit	P48816-B21
HPE ProLiant DL380 Gen11 4LFF SAS/SATA 12G LP Midplane Drive Cage Kit	P48809-B21
HPE ProLiant DL380 Gen11 2LFF Primary Riser Cage Kit	P48823-B21
HPE ProLiant DL380 Gen11 2LFF LP Secondary Riser Cage Kit	P51095-B21
HPE ProLiant DL380 Gen11 2LFF Tertiary Riser Cage Kit	P48826-B21

HPE Networking**1 Gigabit Ethernet adapters**

Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P51181-B21
Intel® I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE	P08449-B21
Broadcom BCM5719 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P51178-B21
Intel® I350-T4 Ethernet 1Gb 4-port BASE-T Adapter for HPE	P21106-B21

10 Gigabit Ethernet adapters

Notes: Unless otherwise noted, one of the below 10Gb networking adapters below can be selected as the primary networking choice when configuring a Networking Choice (NC) Configure-to-Order (CTO) chassis. The DL380 Gen11 NC CTO chassis does not come with embedded networking, hence the requirement to configure with either a FlexibleLOM or select PCIe networking adapter.

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE	P10097-B21
Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ OCP3 Adapter for HPE	P26256-B21

Core Options

Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE
 Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE

P26253-B21
 P26259-B21

25 Gigabit Ethernet adapters

Notes: Unless otherwise noted, one of the below 10/25Gb networking adapters below can be selected as the primary networking choice when configuring a Networking Choice (NC) Configure-to-Order (CTO) chassis.

The DL380 Gen11 NC CTO chassis does not come with embedded networking, hence the requirement to configure with either an OCP3 or select PCIe networking adapter.

Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P26269-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10115-B21
Intel® E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 OCP3 Adapter for HPE	P41614-B21
Intel® E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P10106-B21
Mellanox MCX631432AS-ADAI Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE	P42041-B21
Broadcom BCM57504 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P26264-B21
Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P26262-B21
NVIDIA Ethernet 10/25Gb 2-port SFP28 NVMe-oF Crypto Adapter for HPE	S2A69A
Intel® E810-XXVDA2 Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P08443-B21
Intel® E810-XXVDA4 Ethernet 10/25Gb 4-port SFP28 Adapter for HPE	P08458-B21
Xilinx X2522-25G-PLUS Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P21109-B21
Mellanox MCX631102AS-ADAT Ethernet 10/25Gb 2-port SFP28 Adapter for HPE	P42044-B21

100 Gigabit Ethernet Adapters

Intel® E810-CQDA2 Ethernet 100Gb 2-port QSFP28 OCP3 Adapter for HPE	P22767-B21
Broadcom BCM57608 Ethernet 100Gb 2-port QSFP112 OCP3 Adapter for HPE	P73114-B21
Broadcom BCM57608 Ethernet 100Gb 2-port QSFP112 Adapter for HPE	P73111-B21
Mellanox MCX623106AS-CDAT Ethernet 100Gb 2-port QSFP56 Adapter for HPE	P25960-B21

Notes:

- Only supported at 25C ambient temperature
- Only supported on x16 physical and electrical slots.
- Required to use High-performance Fan Kit (P48820-B21)
- For 8SFF CTO Server with Qty3 of 8SFF Front Cage/ 24SFF CTO Server/ 12LFF CTO Server/ EDSFF CTO Server with EDSFF Bundle, these PCIe cards can be populated in Slot 1, 4, 5, 7 only.
- For 8SFF CTO server with 3 of 8SFF Front cages, 24SFF CTO Server and 12LFF CTO Server the max Qty selected is 3.

Intel® E810-CQDA2 Ethernet 100Gb 2-port QSFP28 Adapter for HPE

P21112-B21

Notes:

- Only supported at 25C ambient temperature.
- Only supported on x16 physical and electrical slots.
- Required to use High-performance Fan Kit (P48820-B21).
- For 8SFF CTO Server with Qty3 of 8SFF Front Cage/ 24SFF CTO Server/ 12LFF CTO Server/ EDSFF. CTO Server with EDSFF Bundle, these PCIe cards can be populated in Slot 1, 4, 5, 7 only.

Core Options

- For 8SFF CTO server with 3 of 8SFF Front cages, 24SFF CTO Server, 12LFF CTO Server and 12 EDSFF CTO Server with EDSFF bundle selected the max Qty supported is 3.

Recommended Ambient Temperature	
System Config	P10180-B21
8LFF	25 °C
24SFF	25 °C (3 max)
16SFF	25 °C
8SFF	30 °C

200 Gigabit Slingshot Adapters

HPE Slingshot SA210S Ethernet 200Gb 1-port PCIe NIC

R4K46A

Notes:

- Can only be selected or configured for a Cray or Slingshot Solution. Not allowed for a Non-Cray or Non-Slingshot Solution.
- Cannot have the following networking options configured within the same server: Slingshot 11 or Slingshot 22.

Storage Offload Adapters

NVIDIA Ethernet 100Gb 2-port NVMe-oF Offload Adapter for HPE

R8M41A

Notes: This storage offload adapter requires selection of two of either 100GbE QSFP28 PSM4 500m XCVR OR 100GbE QSFP28 SR4 100m XCVR transceivers OR HPE 100GbE QSFP28 to QSFP28 5m AOC.

OCP 3.0 Enablement

HPE ProLiant DL360 Gen11 CPU1 to OCP2 x8 Enablement Kit

P51911-B21

HPE ProLiant DL3XX Gen11 OCP1 x16 Enablement Kit

P48827-B21

HPE ProLiant DL3XX Gen11 OCP2 x16 Enablement Kit

P48828-B21

HPE ProLiant DL3XX Gen11 CPU2 to OCP2 x8 Enablement Kit

P48830-B21

DL380 Gen11 OCP 1 and OCP 2 Priority Support Matrix

OCP Slot Location	1 OCP Storage Controller (OROC) + 1OCP NIC	1 OCP NIC	2 OCP NICs	1 OCP Storage Controller (OROC)	2 OCP Storage Controllers (OROC)
OCP 1	OROC	N/A	OCP NIC	OROC (Higher priority)	OROC (Higher priority)
OCP 2 (with shared NIC and WoL)	OCP NIC	NIC (higher priority)	OCP NIC (higher priority)	N/A	OROC

HPE InfiniBand & Ethernet Adapters

HPE InfiniBand NDR/Ethernet 400Gb 1-port OSFP PCIe5 x16 MCX75310AAS-NEAT Adapter	P45641-H23
HPE InfiniBand NDR200/Ethernet 200GbE 2-port QSFP112 PCIe5 x16 MCX755106AC-HEAT Adapter	P65333-H21
HPE InfiniBand NDR200/Ethernet 200Gb 1-port OSFP PCIe5 x16 MCX75310AAS-HEAT Adapter	P45642-H22

Notes:

- High-performance Fan Kit is required (P48820-B21).
- Must be populated in x16 physical and electrical slot.
- Ambient temperature should not exceed 25C.
- The 3 Nvidia CX7 adapters are dual protocol, meaning they can operate in either InfiniBand mode or Ethernet Adapter mode.

Recommended Ambient Temperature

System Config	P31323-B21
8LFF	25C (only to OCP2)
24SFF	Not supported
16SFF	25C (only to OCP2)
8SFF	30C (only to OCP2)

Recommended Ambient Temperature

System Config	P31323-B21
8LFF	Not supported
24SFF	Not supported
16SFF	Not supported
8SFF	25C (only to OCP2)

Other Restrictions

1. High-performance Fan Kit is required (P48820-B21).
2. Not supported on 24SFF CTO server or 12LFF CTO server.
3. Ambient temperature should not exceed 25C.
4. OCP2 x16 Enablement Kit (P48828-B21) is required.
5. 256GB DIMMs are not supported if these adapters are selected.
6. Max = 1Could observe sub-optimal performance if installed in x8 slot.

Notes:

- High-performance Fan Kit is required (P48820-B21).
- Must be populated in x16 physical and electrical slot.

HPE I/O Expansion Options

Notes:

- The Primary Riser shipping default in the CTO server is a x8 FH, FL, x16 FH, FL and x8 FH, HL.
- For a Secondary/Tertiary riser, the second processor is required.
- x16 cards installed on x8 slots could observe sub-optimal performance.

Core Options

Notes:

- Slot 1 – PCIe 5.0 x16 Full Height and Full Length
- Slot 2 – PCIe 5.0 x16 Full Height and Full Length
- Slot 3 – PCIe 5.0 x16 Full Height and Half Length
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 Primary riser must be selected and defaulted.
- If this Primary Riser is selected, then default Primary Riser is replaced with this riser.
- If Slot 1 of HPE DL380 Gen11 2U 3x16 Primary Riser Kit needs to be enabled then 3 x16 Primary Cable Kit (P56073-B21) must be selected.
- If Primary 3 x16 Cable Kit is NOT selected, then only Slot 2 and Slot 3 will be available for PCIe card selection and no PCIe cards can be selected for Slot 1.

HPE ProLiant DL380 Gen11 2U x16/x16/x16 Secondary Riser Kit

P51083-B21

Notes:

- Slot 4 - PCIe 5.0 x16 Full Height and Full Length
- Slot 5 - PCIe 5.0 x16 Full Height and Full Length
- Slot 6 - PCIe 5.0 x16 Full Height and Half Length
- When 2LFF Tertiary Cage is selected then Secondary and Tertiary Riser cannot be selected.
- When 2LFF Secondary Cage is selected then Secondary Riser cannot be selected.
- If 24NVMe Bundle is selected, then Qty 1 of HPE DL380 Gen11 3x16 SEC Riser must be selected and defaulted.
- If Slot 4 of HPE DL380 Gen11 2U 3x16 Secondary Riser Kit needs to be enabled then 3 x16 Secondary Cable Kit (P56074-B21) must be selected.
- If Secondary 3 x16 Cable Kit is NOT selected, then only Slot 5 and Slot 6 will be available and no PCIe cards can be selected for Slot4.
- If Secondary OR Tertiary Riser is selected, then Second Processor must be selected.
- Tertiary Riser and Secondary 3 x16 Riser cannot be selected together.

HPE ProLiant DL380 Gen11 2U Primary/Secondary NEBS-compliant Riser Kit

P48805-B21

Notes:

- GPU and NEBS Riser cannot be selected together.
- When this riser is selected it replaces the default Primary Riser.
- When Primary and Secondary NEBS risers are selected the Tertiary Riser cannot be selected.
- NEBS risers cannot be mixed with other non-NEBS risers.

HPE ProLiant DL380 Gen11 2U Secondary/Tertiary NEBS-compliant Riser Kit

P48806-B21

Notes:

- This riser requires selection of second processor.
- GPU and NEBS Riser cannot be selected together.
- When Primary and Secondary NEBS risers are selected the Tertiary Riser cannot be selected.
- NEBS risers cannot be mixed with other non-NEBS risers.
- When 24 NVMe or 32 NVMe bundles are selected the Tertiary Riser cannot be selected.

HPE ProLiant DL380 Gen11 2U x8/x16/x8 Secondary Riser Kit

P48802-B21

Notes:

- Slot 4 – PCIe 5.0 x8 Full Height and Full Length
- Slot 5 – PCIe 5.0 x16 Full Height and Full Length
- Slot 6 – PCIe 5.0 x8 Full Height and Half Length
- If quantity 1 or quantity 2 of 2SFF Primary/Secondary Drive Cage is selected, then HPE DL380 Gen11 x8x16x8 secondary riser is required.

Core Options

- If quantity 1 of 2SFF Primary/Secondary Drive Cage is selected, then top two slots (Slot 4 and Slot 5) of HPE DL380 Gen11 x8x16x8 Secondary Riser will be blocked by Drive Cage.
- If 2LFF Tertiary Drive Cage is selected, then Secondary and Tertiary Riser cannot be selected.
- If 2LFF Secondary Drive Cage is selected then Secondary Riser cannot be selected.
- If 24NVMe Bundle is selected, then quantity 1 of HPE DL380 Gen11 x8x16x8 secondary riser must be selected.
- If Secondary OR Tertiary Riser is selected, then Second Processor must be selected.

HPE ProLiant DL380 Gen11 2U x16/x16 Tertiary Riser Kit

P48804-B21

Notes:

- This is the tertiary riser.
- Slot 7 - PCIe 5.0 x16 Full Height and Full Length
- Slot 8 - PCIe 4.0 x16 Full Height and Full Length

HPE ProLiant DL380 Gen11 x16/x16/x16 Primary Cable Kit

P56073-B21

HPE ProLiant DL380 Gen11 x16/x16/x16 Secondary Cable Kit

P56074-B21

HPE ProLiant DL380 Gen11 2x16 Tertiary Riser x8 Enablement FIO Bundle Kit

P53632-B21

Risers

Riser Information*							
Part number	Description	Riser position			Bus width (Gen5 lanes)		
		Primary	Secondary	Tertiary	Top slot	Middle Slot	Bottom slot
N/A	This is the default riser in the chassis	D	N	N	x8	x16	x8
P48803-B21	HPE DL380 Gen11 x16/x16/x16 Primary Riser Kit	O	N	N	x16	x16	x16 ¹
P51083-B21	HPE DL380 Gen11 x16/x16/x16 Secondary Riser Kit	N	O	N	x16	x16	x16 ²
P48802-B21	HPE DL38X Gen11 x8/x16/x8 Sec Riser Kit	N	O	N	x8	x16	x8
P48804-B21	HPE DL38X Gen11 2x16 Tertiary Riser Kit	N	N	O	x16	x16 ³	
P48805-B21	HPE ProLiant DL380 Gen11 2U Primary/Secondary NEBS-compliant Riser Kit	O	N	N	x8	x16	x8
P48806-B21	HPE ProLiant DL380 Gen11 2U Secondary/Tertiary NEBS-compliant Riser Kit	N	O	N	x8	x16	x8

Notes:

- D = Default on chassis; O = Optional; N = not supported or slot/connector not present.
- ¹Requires HPE DL380 Gen11 x16/x16/x16 Primary Cable Kit (P56073-B21)
- ²Requires HPE DL380 Gen11 x16/x16/x16 Secondary Cable Kit (P56074-B21)
- ³PCIe Gen4 lanes.
- x16 cards installed on x8 slots could observe sub-optimal performance.

HPE Power Supplies

HPE 800W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38995-B21

Notes: Flex Slot Platinum power supplies support power efficiency of up to 94% and include a standard C-14 power inlet connector.

HPE 1000W Flex Slot Titanium Hot Plug Power Supply Kit

P03178-B21

Notes: Flex Slot Titanium power supplies support power efficiency of up to 96% and include a standard C-14 power inlet connector.

HPE 1600W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit

P38997-B21

Notes: Flex Slot Platinum Plus power supplies support power efficiency of up to 94% and include a C-14 power inlet connector that can support HPE Power Discovery Services (blue connector).

HPE 1600W Flex Slot -48VDC Hot Plug Power Supply Kit

P17023-B21

Notes: Requires selection of HPE 1600W DC PSU power lug option kit OR HPE 1600W DC PSU Power Cable Kit.

HPE 1600W -48VDC Power Cable Lug Kit

P36877-B21

Core Options

HPE 1800W-2200W Flex Slot Titanium Hot Plug Power Supply Kit

P44712-B21

Notes:

- Flex Slot Platinum power supplies support power efficiency of up to 94% and are EU Lot 9 compliant.
- Beginning on January 1st, 2024, units sold into the European Union (EU), European Economic Area (EEA), the United Kingdom, or Switzerland must include more efficient AC power supplies: 94% for multi-output and 96% for single output. HPE Flexible Slot power supplies are single-output, and part numbers 865438-B21, P03178-B21, and P44712-B21 are 96% efficient, thus meeting requirements. HPE is on target to fulfil compliant systems ahead of time and will begin enforcing these requirements in advance to satisfy requests with the current power supplies by the set deadline.

HPE Cooling Options

HPE ProLiant DL380/DL560 Gen11 2U High-performance Fan Kit

P48820-B21

Notes:

- This kit is required for specific [Ambient temperature environments](#).
- High-performance fan kit consists of 6 fans; these will need to replace all the standard fans in the unit and fill all 6 fan cages.
- The 24SFF CTO server will already include 6 High-performance fans.
- The High-Performance fan kit is needed to support certain ASHRAE operating environments.
- For elevated ambient temperature support refer to:
[DL380 Gen11 Extended Ambient Temperature Guidelines](#).

HPE ProLiant DL380 Gen11 Standard Fan Kit

P49146-B21

Notes:

- Includes two standard fans.
- Not supported with 24SFF and 12EDSFF CTO Server.
- High-performance Fan Kit and Standard Fan Kit cannot be selected together.
- High-performance Fan Kit can be selected over Standard Fan Kit in all configurations.

HPE ProLiant DL380 Gen11 Max Performance Heat Sink Kit

P48817-B21

Notes: This kit is required for "Q" series processors.

HPE ProLiant DL380/DL560 Gen11 High-performance 2U Heat Sink Kit

P48818-B21

Notes: This kit is CPUs with TDP over 150W.

HPE ProLiant DL3XX/560 Gen11 High-performance Heat Sink Kit

P48905-B21

Notes: This kit is a low-profile high-performance heatsink. This heatsink is required when a mid-tray storage cage is selected.

HPE ProLiant DL380 Gen11 Standard Heat Sink Kit

P49145-B21

Notes: The standard heatsink is for CPUs with TDP equal to or lower than 150W.

HPE Direct Liquid Cooling Options for HPE ProLiant DL380 Gen11

HPE ProLiant DL380 Gen11 Cold Plate Module NS204 Quick Disconnect Tube Set FIO Kit

P62023-B21

Notes:

- This kit is the Direct Liquid Cooling Kit that uses the NS204i-u slot for connections
- If this option is selected the HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device(P48183-B21) cannot be selected.
- This kit contains 2 Cold Plate Modules and 1 Quick Disconnect Module.

HPE ProLiant DL3XX Gen11 Cold Plate Module FIO Kit from PCIe

P62029-B21

Notes:

- This kit is the Direct Liquid Cooling Kit that uses a PCIe slot on the Primary Riser.
- If this option is selected the Primary Riser will have one less PCIe slot available for PCIe adapters. Please keep this in mind when considering total number of PCIe adapters required.
- This kit contains 2 Cold Plate Modules and 1 Quick Disconnect Module.

HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 600mm FIO Hose Kit

P62038-B21

Notes:

- This kit includes the 65CM tube kit for Direct Liquid Cooling.
- This kit must be selected when using the Direct Liquid Colling Kit in the NS204i-u slot (P62023-B21).

HPE ProLiant DL3XX Gen11 Direct Liquid Cooling 55cm Quick Disconnect Tube Set FIO Kit

P62042-B21

Notes:

- This kit includes a 55CM tube kit for Direct Liquid Cooling.
- This kit must be selected when using the Direct Liquid Colling Kit in the Primary Riser slot (P62029-B21).

Additional Options

Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett Packard Enterprise recommends the use of an HPE approved configurator. Contact your local sales representative for additional information.

HPE Computation and Graphics Accelerators

NVIDIA H100 NVL 94GB PCIe Accelerator for HPE

S2D86C

Notes:

- Max =3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.
- Mixing of Graphics options is not allowed.
- High-performance Fan Kit is required.
- The system memory must be at least twice the memory of all GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected.
- For best performance across common workloads, HPE recommends system main memory at least twice the memory of all GPU.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- GPU and NEBS Riser cannot be selected together.

NVIDIA RTX 4000 Ada Graphics Accelerator for HPE

S3T54C

Notes:

- Max = 5
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.
- Mixing of Graphics options is not allowed.
- High-performance Fan Kit is required.
- The system memory must be at least twice the memory of all GPUs.
- If this GPU is selected, then HPE DL380 Gen11 2U 8p GPU Power Cable Kit (P77896-B21) must be selected and defaulted.
- GPU and NEBS Riser cannot be selected together.

Intel® Data Center GPU Max 1100 48GB Accelerator for HPE

S1T66C

Notes:

- Max = 3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Thermal constraints for this GPU are based on ambient temperature of 25 degrees Centigrade.

Additional Options

- Mixing of GPU types is not allowed.
- High-performance Fan Kit is required.
- This GPU is not supported with 12LFF CTO Server and 24SFF CTO Server.
- The system memory must be at least twice the memory of all GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- For the DL380 Gen11 12EDSFF CTO Server, If EDSFF Bundle is selected then this GPU cannot be selected.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21) must be selected.
- If this GPU is selected, then High-performance Heatsink or Direct Liquid Cooling (DLC) must be selected.
- If this GPU is selected with Intel® Liquid Cooled Processors (Q) then Direct Liquid Cooling (DLC) must be selected.

NVIDIA L40S 48GB PCIe Accelerator

S2L70C

Notes:

- Max = 3
- Must be populated in x16 slot.
- If Qty 2 or 3 of DW GPU is selected with no tertiary riser, then primary 3 x16 riser cable and secondary 3 x16 Riser Cable cannot be selected. Thermal constraints are based on Ambient Temp 25C.
- Mixing of GPU types is not allowed.
- For 8SFF/ 8LFF/ 12LFF/ 12EDSFF CTO Server, If GPU is selected then High-Performance Fan Kit must be selected and defaulted.
- This GPU is not supported with 12LFF CTO Server and 24SFF CTO Server.
- For 8SFF CTO Server, If Qty3 of 8SFF Front cage is selected then this GPU cannot be selected.
- For best performance across common workloads, HPE recommends system main memory at least twice the memory of all GPU.
- If doublewide GPU is selected on this riser, then the top x16 PCIe slot (FH FL) connector on this riser kit cannot be utilized as the doublewide GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If Qty1 of 2SFF primary/secondary cage is selected, then Doublewide GPU Cannot be populated on HPE DL380 G11 2U x8/x16/x8 Sec Riser Kit.
- If Qty2 of 2SFF Primary/secondary cage is selected, then Doublewide GPU Cannot be populated on HPE DL380 G11 2U x8/x16/x8 Sec Riser Kit and Default Primary Riser.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- For 12EDSFF CTO Server, If EDSFF Bundle is selected then this GPU cannot be selected.
- If this GPU is selected, then HPE DL380/DL560 Gen11 2U GPU Power Cable Kit must be selected and defaulted.
- For 8SFF CTO Server, If Qty1 of 8SFF Front cage is selected then Max of 2 GPU can be selected per Server.
- For 12EDSFF CTO Server, if no additional cage is selected then Max of 2 GPU can be selected per Server.

Additional Options

- For 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected with NO DLC Component then this GPU is not supported.
- For 12EDSFF CTO Server, if additional cage is selected with NO DLC Component then this GPU is not supported
- For 8LFF CTO Server, If NO DLC component is selected then this GPU is not supported.
- For 8SFF CTO Server, If Qty2 of 8SFF Front cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- For 12EDSFF CTO Server, if one additional 8SFF cage is selected with DLC Component then Max 1 GPU can be selected per sever.
- For 8LFF CTO Server, If DLC component is selected then Max 1 GPU can be selected per sever.
- For 8SFF CTO Server with two 8SFF cages/ 8LFF CTO Server/ 12EDSFF CTO Server with 8SFF Cage or EDSFF Bundle/ 12LFF CTO Server/ 24SFF CTO Server, If Qty1 or 2 of this GPU is selected with NO DLC Component then Secondary 3x16 cable cannot be selected
- If Qty1 or 2 of this GPU is selected with NO DLC Component then Secondary 3x16 cable cannot be selected
- If Qty1 of this GPU is selected then Secondary OR Tertiary Riser Must be selected. If Qty2 of this GPU is selected then Secondary AND Tertiary Riser Must be selected.
- GPU and NEBS Riser cannot be selected together.
- If Full Length (FL) GPU is selected then High-Performance HS or DLC must be selected for Processors.
- If Full Length (FL) GPU is selected with this Processor then DLC Module must be selected for Processors.
- If Doublewide GPU is selected on default Primary Riser then the top x16 PCIe slot (FH FL) connector CANNOT be utilized as the Doublewide GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- If this GPU is selected then Secondary 3x16 cable cannot be selected.
- This GPU cannot be populated on primary Riser. The “PCIe Card Capacity Limits” must account for this limitation.
- For 8SFF CTO Server with two 8SFF cages/ 8LFF CTO Server/ 12EDSFF Server with one 8SFF Cage, If Qty1 this GPU is selected with DLC Module then Tertiary Riser must be selected. GPU is populated on Tertiary Riser.

NVIDIA L40 48GB PCIe Accelerator for HPE

SOK90C

Notes:

- Max = 3
- Must be populated in x16 slot.
- System memory should be 2x of GPU memory.
- Requires selection of High-Performance Fan Kit.
- This GPU requires HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit - P56072-B21
- On 8SFF CTO Server, if Qty2 of 8SFF Front cage is selected without DLC component then Max of 2 GPU can be selected per Server.
- On 8SFF CTO Server, if Qty1 of 8SFF Front cage is selected then Max of 3 GPU can be selected per Server.
- On 8LFF CTO Server, if NO DLC component is selected then Max of 2 GPU can be selected per Server

Additional Options

- On 8LFF CTO Server, if DLC component is selected then Max of 3 GPU can be selected per Server.
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages if NO DLC component is selected then Max of 1 GPU can be selected per Server
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages and DLC component is selected then Max of 2 GPU can be selected per Server.
- On 12EDSFF CTO Server, if one additional 8SFF cage is selected without DLC Component then Max 2 GPU can be selected per sever.
- On 12EDSFF CTO Server, if one additional 8SFF cage is selected with DLC Component then Max 3 GPU can be selected per sever.
- On 8SFF CTO Server, if Qty2 of 8SFF Front cage is selected with DLC component then Max of 3 GPU can be selected per Server.

NVIDIA L4 24GB PCIe Accelerator for HPE

SOK89C

Notes:

- Max = 8
- System memory should be 2x of GPU memory.
- Requires selection of High-Performance Fan Kit
- On 12LFF CTO Server, 24SFF CTO Server, or 8SFF CTO Server with Qty3 8SFF drive cages are selected without DLC component then Max of 5 can be selected per server

NVIDIA A16 64GB PCIe Non-CEC Accelerator for HPE

R8T26C

Notes:

- Max = 3
- System memory should be 2x of GPU memory.
- This GPU requires power Cable Kit (P39102-B21) to also be selected.
- This GPU requires HPE DL380/DL560 G11 2U High Perf Fan Kit P48820-B21.

Intel® Data Center GPU Max 1100 48GB Accelerator for HPE

S1T66C

Notes:

- Max = 3
- This GPU is PCIe x16, so it must be populated on a x16 slot only. The “PCIe Card Capacity Limits” must account for this limitation.
- Mixing of GPU types is not allowed.
- Requires selection of High-Performance Fan Kit.
- System memory should be 2x of GPU memory.
- Quantity1 of this cable can support max of 3 double wide GPUs.
- When this GPU is selected then the top x16 PCIe slot (FH FL) connector on the riser kit CANNOT be utilized as the GPU occupies this space. The “PCIe Card Capacity Limits” must account for this limitation.
- Full Length (FL) PCIe Card and Mid Tray cannot be selected together.
- This GPU requires HPE DL380/DL560 Gen11 2U GPU Power Cable Kit (P56072-B21)
- If Qty2 of this GPU is selected, then Secondary Riser must be selected.
- For 12LFF CTO Server/ 24SFF CTO Server/ 8SFF CTO Server with front 3 8SFF Cage/ 12EDSFF CTO Server with EDSFF Bundle, if this GPU is selected then DLC Must be selected.
- If Qty3 of DW GPU is selected, then primary 3 x16 Riser cable and secondary 3 x16 Riser Cable cannot be selected.

Additional Options

HPE ProLiant DL300 Gen10 Plus GPU 8-pin Keyed Cable Kit

P39102-B21

Notes:

- This GPU power cable is used for NVIDIA A16.
- One power cable supports up to 3x GPUs

HPE ProLiant DL380/DL560 Gen11 2U GPU Power Cable Kit

P56072-B21

Notes:

- This GPU power cable is used for NVIDIA H100 and NVIDIA L40 GPUs.
- One power cable supports up to 3x GPUs

GPU Information

Notes: The listed ambient temperatures represent the maximum levels allowed without any impact on system performance (e.g., throttling). It is possible to exceed these temperatures by an additional +5°C without causing a system shutdown, but performance degradation might be expected.

HPE DL380 Gen11 Configuration

Part number	Card	Qty Supported	PCIe	8SFF	16SFF/8LFF	24SFF/12LFF
S1T66C	Intel® Data Center GPU Max 1100	2 or 3	Gen5	3@30 C(Air)	3@25 C (Air) 3@30 C (Air) if CPU ≤ 185 W	Not Supported
R9S41C	NVIDIA H100 80GB PCIe Accelerator	2 or 3	Gen5	2@25 C (Air) 3@25 C (DLC)	2 @ 20 C (Air) 2 @ 25 C (DLC) 1 @ 25 C (Air) if CPU ≤ 185 W	Not Supported
S2D86C	NVIDIA H100 NVL 94GB PCIe Accelerator	1, 2 or 3	Gen5	3@27 C (Air) 2@30 C (Air) 3@30 C (DLC)	3@18 C (Air) 2@27 C (Air) 3@25 C (DLC)	1@25 C (Air) 2@25 C (DLC)
S3T54C	NVIDIA RTX 4000 Ada Graphics Accelerator for HPE	up to 5	Gen4	3@30 C (Air) 3@30 C (DLC) 5@27 C (Air) 5@27 C (DLC)	3@30 C (Air) 3@30 C (DLC) 5@27 C (Air) 5@27 C (DLC)	3@30 C (Air) 3@30 C (DLC) 5@27 C (Air) 5@27 C (DLC)
S0K90C	NVIDIA L40 48GB PCIe Accelerator	1, 2 or 3	Gen4	3@25 C (Air) 2@30 C (Air) 3@30 C (DLC)	2@30 C (Air) 3@25 C (DLC) 2@30 C (Air) if CPU ≤ 185 W 3@25 C (Air) if CPU ≤ 185 W	1@25 C (Air) 2@25 C (DLC) 2@25 C (Air) if CPU ≤ 185 W
S2L70C	NVIDIA L40S 48GB PCIe Accelerator	1 or 2	Gen5	2@25 C (Air) 3@25 C (DLC)	2 @ 20 C (Air) 2 @ 25 C (DLC) 1 @ 25 C (Air) if CPU ≤ 185 W 3 @ 25 C (DLC) if CPU ≤ 185 W	Not Supported
S0K89C	NVIDIA L4 24GB PCIe Accelerator	Up to 8	Gen4	8@30 C (Air) 8@30 C (Air)	5@30 C (Air) 8@25 C (Air) 8@30 C (DLC)	5@25 C (Air) 8@25 C (DLC)
R8T26C	NVIDIA A16 64GB PCIe Non-CEC Accelerator for HPE	1, 2 or 3	Gen4	30 C	2@30 C (Air) 3@30 C (DLC) 3@25 C (Air) if CPU≤ 185 W	1@30 C (Air) 2@25 C (Air) 3@25 C (DLC) 3@25 C (Air) if CPU≤ 185 W

Additional Options

Qty SFF Drive Cages	Cooling Method	NVIDIA A16
1 drive cage	Air Cooled + Heatsink	3
2 drive cages	Air Cooled + Heatsink	2
3 drive cages	Air Cooled + Heatsink	1
1 drive cage	Direct Liquid Cooling	3
2 drive cages	Direct Liquid Cooling	3
3 drive cages	Direct Liquid Cooling	2

Embedded Management**HPE iLO Common Password FIO Setting**

HPE iLO Common Password FIO Setting

P08040-B21

Notes:

- Replaces iLO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE ILO Advanced

HPE iLO Advanced Electronic License with 1yr Support on iLO Licensed Features

E6U59ABE

HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features

512485-B21

HPE iLO Advanced AKA Tracking License with 1yr Support on iLO Licensed Features

512487-B21

HPE iLO Advanced Electronic License with 3yr Support on iLO Licensed Features

E6U64ABE

HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features

BD505A

HPE iLO Advanced AKA Tracking License with 3yr Support on iLO Licensed Features

BD507A

HPE Converged Infrastructure Management Software

HPE OneView including 3yr 24x7 Support Flexible Quantity E-LTU

E5Y35AAE

HPE OneView w/o iLO including 3yr 24x7 Support Flexible Quantity E-LTU

P8B26AAE

Notes: Licenses ship without media. The HPE OneView Media Kit can be ordered separately, or can be [downloaded](#).

HPE Security

HPE Trusted Supply Chain for HPE ProLiant

P36394-B21

Notes:

- HPE Trusted Supply Chain (P36394-B21) is an optional security upgrade intended for agencies and regulated industries needing enhanced security and compliance needs. Applying this option to a DL380 Gen11 CTO server ensures it is built in the USA in a secured facility by vetted HPE personnel assigned to the manufacturing processes. A multitude of checkpoints/inspections for malicious microcode and counterfeit parts are performed throughout the server build, and additional safeguards are put in place against cyber-exploits throughout the server lifecycle. The HPE ProLiant DL380 Gen11 is re-branded as a HPE ProLiant DL380T Gen11 to denote the HPE Trusted Supply Chain security enhancements. The DL380T Gen11 is Trade Agreement Act (TAA) compliant. Learn more at <https://www.hpe.com/security>
- This option requires the selection of HPE Gen11 Intrusion Detection Kit (P48922-B21)
- This option requires the selection of either HPE iLO Advanced 1-server License with 3yr Support on iLO Licensed Features (BD505A) or HPE iLO Advanced 1-server License with 1yr Support on iLO Licensed Features (512485-B21)
- This option is limited to stand-alone DL380 Gen11 CTO servers only. The HPE Trusted Supply Chain configuration will not be available if the server is ordered as factory integrated into a rack
- One instance of the following Electronic License to Use is required per order (not per server): R6X85AAE
- HPE Trusted Supply Chain E-LTU
- Logistics delivery speeds and services are available and selectable within Next Gen Quoter.
- This option cannot be selected with TAA instruction SKU nor TAA CTO Models

HPE iLO Common Password FIO Setting

P08040-B21

Notes:

- Replaces ILO default randomized password by an HPE defined common password. HPE highly recommends changing this password immediately after the initial onboarding process.
- Customers who want to choose their own custom iLO default password should use the HPE Factory Express Integration Services

HPE Gen11 2U Bezel Kit

P50400-B21

HPE Bezel Lock Kit

875519-B21

Notes: Requires the bezel kit

Additional Options

HPE Boot Controllers

HPE NS204i-u Gen11 NVMe Hot Plug Boot Optimized Storage Device	P48183-B21
HPE NS204i-u v2 960GB NVMe Hot Plug Boot Optimized Storage Device	P81160-B21
HPE NS204i-u v2 960GB NVMe SED Hot Plug Boot Optimized Storage Device	P81162-B21

Notes:

- These NS204i-u hot pluggable boot device
- Default is NVMe are internal to system and not hot pluggable
- If external accessible drives are needed, please add trigger SKU P54542-B21 HPE ProLiant DL380 Gen11 NS204i-u FIO Bundle Kit. This trigger SKU allows NVMe drives to be externally accessible and hot pluggable.
- Max = 1

HPE ProLiant DL380 Gen11 NS204i-u Internal Cable Kit	P52152-B21
--	------------

Notes:

- If NS204i-u Gen11 Hot Plug Boot Option Device is selected then HPE DL380 Gen11 NS204i-u Internal Cable Kit is required.
- Max = 1

HPE ProLiant DL380 Gen11 NS204i-u FIO Bundle Kit	P54542-B21
--	------------

Notes:

- This SKU is required only when external accessible drives are required for the NS204i-u.
- Max = 1

HPE Storage Controllers

The Gen11 storage controller portfolio has been updated to include new technology like OCP3.0 as well as PCIe adapters. For a more detailed breakout of the available Gen11 controllers visit the storage controllers QuickSpecs site: [HPE MegaRAID Storage Controllers](#)

HPE Tri-Mode Controllers

HPE MR416i-p Gen11 x16 Lanes 8GB Cache PCI SPDM Plug-in Storage Controller	P47777-B21
HPE MR416i-o Gen11 x16 Lanes 8GB Cache OCP SPDM Storage Controller	P47781-B21
HPE MR216i-p Gen11 x16 Lanes without Cache PCI SPDM Plug-in Storage Controller	P47785-B21
HPE MR216i-o Gen11 x16 Lanes without Cache OCP SPDM Storage Controller	P47789-B21
HPE MR408i-o Gen11 x8 Lanes 4GB Cache OCP SPDM Storage Controller	P58335-B21
HPE ProLiant DL320/DL380 Gen11 PCIe Gen5 Retimer Card	P48833-B21

Notes:

- Requires HPE ProLiant DL360 Gen11 Storage Controller Enablement Cable Kit (P48918-B21)
- When adding this Retimer as a field upgrade, it is recommended to update the UBM5 PIC to a minimum of version 1.10. This firmware can be downloaded at: https://support.hpe.com/connect/s/softwaredetails?language=en_US&softwareId=MTX_23c46bf_bef394b5e9353075c5e

HPE SR932i-p Gen11 x32 Lanes 8GB Wide Cache PCI SPDM Plug-in Storage Controller	P47184-B21
---	------------

Notes: Requires x16 riser slot

Additional Options

Essential RAID Controllers

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller

804398-B21

E208e-p Support Limitations	
Controller Based Encryption (CBE)	For D3000 Enclosure, CBE with a remote key management server is not supported in a Gen 11 server. Local key management still works. For Tape and MSA: CBE is not a valid feature.
One Button Secure Erase (OBSE)	OBSE is used to sanitize drives (for D3000 Enclosure only) and factory reset the controller is not supported in a Gen11 server. Alternatively, users can use Redfish #Storage.ResetToDefaults or #Drive.SecureErase actions.

NVMe Adapter

HPE DL385 Gen10 Plus 12Gb NVMe 2-port Adapter

P25527-B21

HPE Cable Options

HPE ProLiant DL380 Gen11 12EDSFF CPU1/2 Cable Kit

P52153-B21

HPE ProLiant DL360 Gen11 Storage Controller Enablement Cable Kit

P48918-B21

HPE ProLiant DL380 Gen11 8SFF CPU1/2 NVMe Cable Kit

P48825-B21

HPE ProLiant DL380 Gen11 8SFF OROC1/2 x2 Cable Kit

P48829-B21

HPE ProLiant DL380 Gen11 2U Tri-Mode Premium Cable Kit

P48831-B21

HPE ProLiant DL380 Gen11 Tri-Mode Splitter Cable Kit

P48832-B21

HPE ProLiant DL380 Gen11 PCIe Gen5 Retimer Card Cable Kit

P52154-B21

HPE ProLiant DL380 Gen11 8SFF to Retimer/-P Controller Cable Kit

P54874-B21

HPE ProLiant DL380 Gen11 LFF Front Tri-Mode Cable Kit

P56995-B21

Optional Upgrades

HPE 96W Smart Storage Lithium-ion Battery with 145mm Cable Kit

P01366-B21

HPE Smart Storage Hybrid Capacitor with 145mm Cable Kit

P02377-B21

Notes: Provides backup power for multiple HPE storage controllers or other devices.

Additional Options

HPE Tape Backup

For the complete range of tape drives, autoloaders, libraries, and media see:

<https://www.hpe.com/us/en/storage/storeever-tape-storage.html>.

For hardware and software compatibility of Hewlett Packard Enterprise tape backup products please visit the StoreEver Tape Solutions in SPOCK (requires registration/login) <https://h20272.www2.hpe.com/SPOCK/default.aspx>.

Only external drives supported.

All libraries and autoloaders supported via compatible FC or SAS controller. Refer to the StoreEver Tape Solutions Compatibility Matrix link above.

HPE Storage Options

Emulex Fibre Channel HBAs

HPE SN1610E 32Gb 1-port Fibre Channel Host Bus Adapter	R2J62A
HPE SN1610E 32Gb 2-port Fibre Channel Host Bus Adapter	R2J63A
HPE SN1700E 64Gb 1-port Fibre Channel Host Bus Adapter	R7N77A
HPE SN1700E 64Gb 2-port Fibre Channel Host Bus Adapter	R7N78A

QLogic Fibre Channel HBAs

HPE SN1610Q 32Gb 1-port Fibre Channel Host Bus Adapter	R2E08A
HPE SN1610Q 32Gb 2-port Fibre Channel Host Bus Adapter	R2E09A
HPE SN1700Q 64Gb 1-port Fibre Channel Host Bus Adapter	R7N86A
HPE SN1700Q 64Gb 2-port Fibre Channel Host Bus Adapter	R7N87A

HPE Racks

- Refer to the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Advanced Series Racks](#)
- Refer to the HPE Enterprise Series Racks QuickSpecs for information on additional racks options and rack specifications. [HPE G2 Enterprise Series Racks](#)

HPE Power Distribution Units (PDUs)

- Refer to the [HPE Basic Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications.
- Refer to the [HPE Metered Power Distribution Units \(PDU\) QuickSpecs](#) for information on these products and their specifications. Refer to the [HPE Intelligent Power Distribution Unit \(PDU\)](#) QuickSpecs for information on these products and their specifications.
- Refer to the [HPE Metered and Switched Power Distribution Units \(PDU\)](#) QuickSpecs for information on these products and their specifications.

HPE Uninterruptible Power Systems (UPS)

- To learn more, please visit the [HPE Uninterruptible Power Systems \(UPS\)](#) web page.
- Refer to the [HPE Direct Flow Three Phase Uninterruptible Power System QuickSpecs](#) for information on these products and their specifications.
- Refer to the [HPE Line Interactive Single-Phase UPS QuickSpecs](#) for information on these products and their specifications.

HPE Rack Options

Refer to the [HPE KVM Switches web page](#) for information on these products and their specifications.

Easy Install Rail Kits

Easy Install rail kits contain telescoping rails which allow for in-rack serviceability.

To assist in the installation of the server into the rack an optional installation tool is available by contacting your local services representative.

Notes:

- Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations. Please refer to your installation instructions for proper tools and number of people to use for any installation.
- HPE rail kits are designed to work with HPE racks in compliance with industry standard EIA-310-E. In the event a customer elects to purchase a third-party rack for use with an HPE rail kit, any such use is at customer's own risk. HPE makes no express or implied warranties with respect to such third-party racks and specifically disclaims any implied warranties of merchantability and fitness for a particular purpose. Furthermore, HPE has no obligation and assumes no liability for the materials, design, specifications, installation, safety, and compatibility of any such third-party racks with any rail kits, including HPE rail kits.

HPE ProLiant DL3XX Gen11 Easy Install Rail 3 Kit

P52341-B21

Notes: Does not include Cable Management Arm (CMA) (P22020-B21).

HPE DL38X Gen10 Plus 2U Cable Management Arm for Rail Kit

P22020-B21

HPE USB and SD Options

Notes:

- In vSphere 7.0, VMware made changes that impact the use of an SD Card/USB media as a standalone boot device and will be removing support for them after version 7.x.
- SD Card/USB media can still be used as a standalone boot option through all 7.x releases via published Customer Advisory [Usage of SD Card/USB Devices As Standalone Boot Devices Has Changed Due to System Storage Changes For VMware ESXi 7.0 \(Or Later\)](#).
- For any major release beyond VMware ESXi 7.x, VMware will require M.2 or another local persistent device as the standalone boot option.

HPE Support Services

Installation & Startup Services


HPE ProLiant DL/ML Install Service	U4554E
HPE ProLiant DL/ML Startup Service	U4555E

Tech Care Services

HPE 3 Year Tech Care Essential DL380 Gen11 HW Service	H93G4E
HPE 3 Year Tech Care Essential wDMR DL380 Gen11 HW Service	H93G5E
HPE 5 Year Tech Care Essential DL380 Gen11 HW Service	H93J8E
HPE 5 Year Tech Care Essential wDMR DL380 Gen11 HW Service	H93J9E

Notes: For a full listing of support services available for this server, please visit <https://www.hpe.com/services>.

Memory Population guidelines

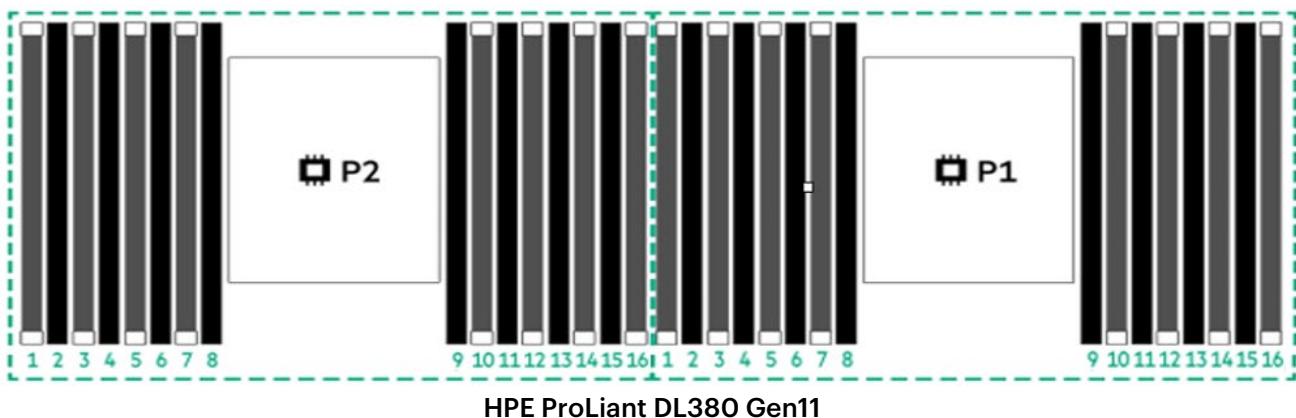

HPE ProLiant Gen11 16 slot per CPU DIMM population order

DIMM population order

DIMM slot	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1 DIMM										10						
2 DIMMs ²			3							10						
4 DIMMs ²			3					7		10				14		
6 DIMMs			3		5		7			10			14			16
8 DIMMs ^{1,2}	1		3		5		7			10	12		14			16
12 DIMMs	1	2	3		5	6	7			10	11	12		14	15	16
16 DIMMs ^{1,2}	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Notes:

- Ommited DIMM counts/socket not qualified by Intel®.
- ¹ Supports SGX (Software Guard Extensions)
- ² Support Hemi (hemisphere mode).

General Memory Population Rules and Guidelines:

- DIMMs should be installed in quantities of even numbers.
- Install DIMMs only if the corresponding processor is installed.
- If only one processor is installed in a two-processor system, only half of the DIMM slots are available.
- To maximize performance, it is recommended to balance the total memory capacity between all installed processors.
- When two processors are installed, balance the DIMMs across the two processors.
- White DIMM slots denote the first slot to be populated in a channel.
- Mixing of DIMM types (UDIMM, RDIMM, and LRDIMM) is not supported.
- Mixing of x4 and x8 memory is not allowed.
- The maximum memory speed is a function of the memory type, memory configuration, and processor model.

Memory

- The maximum memory capacity is a function of the number of DIMM slots on the platform, the largest DIMM capacity qualified on the platform, and the number and model of installed processors qualified on the platform.
- For details on the HPE Server Memory Options Population Rules, visit: [Server memory populations rules for HPE Gen11 servers with 4th Gen Intel® Xeon® Scalable processors](#)
- To realize the performance memory capabilities listed in this document, HPE DDR5 Smart Memory is required.
- For additional information, refer to the [HPE DDR5 Smart Memory QuickSpecs](#).

HPE SKU P/N	P43322-B21	P43328-B21	P43331-B21
SKU Description	HPE 16GB (1x16GB) Single Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	HPE 32GB (1x32GB) Dual Rank x8 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit	HPE 64GB (1x64GB) Dual Rank x4 DDR5-4800 CAS-40-39-39 EC8 Registered Smart Memory Kit
DIMM Capacity	16 GB	32 GB	64 GB
DIMM Rank	Single Rank (1R)	Dual Rank (2R)	Dual Rank (2R)
Voltage	1.1 V	1.1 V	1.1 V
DRAM Depth [bit]	2G	2G	4G
DRAM Width [bit]	x8	x8	x4
DRAM Density	16 Gb	16 Gb	16 Gb
CAS Latency	40-39-39	40-39-39	40-39-39
DIMM Native Speed	4800 MT/s	4800 MT/s	4800 MT/s

HPE SKU P/N	P43334-B21	P43337-B21
SKU Description	HPE 128GB (1x128GB) Quad Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit	HPE 256GB (1x256GB) Octal Rank x4 DDR5-4800 CAS-46-39-39 EC8 Registered 3DS Smart Memory Kit
DIMM Capacity	128 GB	256 GB
DIMM Rank	Quad Rank (4R)	Octal Rank (8R)
Voltage	1.1 V	1.1 V
DRAM Depth [bit]	4G	4G
DRAM Width [bit]	x4	x4
DRAM Density	16 Gb	16 Gb
CAS Latency	40-39-39	40-39-39
DIMM Native Speed	4800 MT/s	4800 MT/s

Notes: The maximum memory speed is a function of the memory type, memory configuration, and processor model.

For details on the HPE Server Memory speed, visit: <https://www.hpe.com/docs/memory-speed-table>

DDR5 memory options part number decoder

Notes:


- Capacity references are rounded to the common gigabyte (GB) values.
 - 8GB = 8,192 MB
 - 16GB = 16,384 MB
 - 32GB = 32,768 MB
 - 64GB = 65,536 MB
 - 96GB = 98,304 MB
 - 128GB = 131072 MB
 - 256GB = 262144 MB
 - 512GB = 524288 MB

For more information on memory, refer to the Memory QuickSpecs: [HPE DDR5 Smart Memory](#)


Memory Speed Table for HPE ProLiantDL380 Gen11

For details on the HPE Server Memory speed, please visit: <https://www.hpe.com/docs/server-memory>

Storage

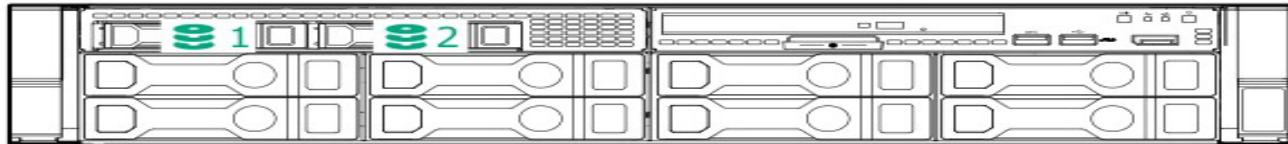


8LFF chassis with Universal media bay and optional 2SFF and optical drive shown

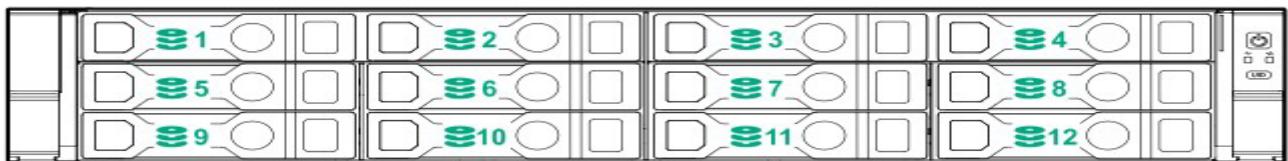

12LFF chassis



24SFF + rear 2 SFF drives

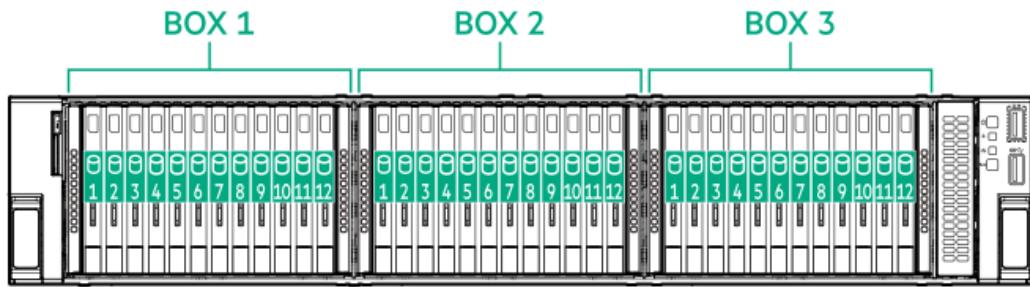

12EDSFF chassis

Technical Specifications

System Unit

Dimensions

- **SFF CTO servers:**
8.75 x 44.8 x 72.7 cm / 3.44 x 17.64 x 28.62 in
- **LFF CTO servers:**
8.75 x 44.8 x 73.25 cm / 3.44 x 17.64 x 28.84 in

Weight (approximate)

- **Maximum:** 8 SFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x RAID controller, 2x Risers installed
 - **Maximum:** 33kg/72.75 lbs.
 - **Minimum:** 16kg/35.27 lbs.
- **Maximum:** 12LFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x RAID controller, 2x Risers installed
 - **Maximum:** 37kg/81.57 lbs.
 - **Minimum:** 18kg/39.68 lbs.

Input Requirements (per power supply)

Rated Line Voltage

- For 1800W-2200W (Titanium) Power Supply: 200-240 VAC
- For 1600W (Platinum) Power Supply: 200-240 VAC
- For 1000W (Titanium): 100 to 240 VAC
- For 800W (Titanium) Power Supply: 200-240 VAC
- For 800W (Platinum) Power Supply: 100-240 VAC
- For 800W (Universal) Power Supply: 200-277 VAC

BTU Rating

Maximum

- For 1800W-2200W Power Supply: 6497 BTU/hr. (at 200 VAC), 6868 BTU/hr. (at 208 VAC), 7230 BTU/hr. (at 220 VAC), 7596 BTU/hr. (at 230VAC), 7962 BTU/hr. (at 240VAC)
- For 1600W Power Supply: 5918 BTU/hr. (at 200 VAC), 5888 BTU/hr. (at 220 VAC), 5884 BTU/hr. (at 240 VAC)
- For 1000W (Titanium) Power Supply: 3741 BTU/hr. (at 100 VAC), 3596 BTU/hr. (at 200 VAC), 3582 BTU/hr. (at 240 VAC)
- For 800W (Titanium) Power Supply: 2905 BTU/hr. (at 200 VAC), 2899 BTU/hr. (at 220 VAC), 2893 BTU/hr. (at 240 VAC)
- For 800W (Platinum) Power Supply: 3067 BTU/hr. (at 100 VAC), 2958 BTU/hr. (at 200 VAC), 2949 BTU/hr. (at 240 VAC)
- For 800W (Universal) Power Supply: 2964 BTU/hr. (at 200 VAC), 2951 BTU/hr. (at 230 VAC), 2936 BTU/hr. (at 277 VAC)

Technical Specifications

Relative Humidity (non-condensing)

- **Operating**
8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing.
- **Non-operating**
5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

Power Supply Output (per power supply)

Rated Steady-State Power

- For 1800W-2200W Power Supply: 1800W (at 200 VAC), 1900W (at 208 VAC), 2000W (at 220 VAC), 2100W (at 230VAC), 2200W (at 240VAC)
- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1097W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)

Maximum Peak Power

- For 1800W-2200W Power Supply: 1800W (at 200 VAC), 1900W (at 208 VAC), 2000W (at 220 VAC), 2100W (at 230VAC), 2200W (at 240VAC)
- For 1600W Power Supply: 1600W (at 240 VAC), 1600W (at 240 VDC) for China only
- For 1000W (Titanium) Power Supply: 1000W (at 100 VAC), 1000W (at 240 VAC), 1000W (at 240 VDC) input for China only
- For 800W (Titanium) Power Supply: 800W (at 200 VAC), 800W (at 240 VAC), 800W (at 240 VDC) for China only
- For 800W (Platinum) Power Supply: 800W (at 100 VAC), 800W (at 240 VAC), 800W (at 240 VDC) input for China only
- For 800W (Universal) Power Supply: 800W (at 200 VAC), 800W (at 277 VAC)

Technical Specifications

System Inlet Temperature

– Standard Operating Temperature

10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft.) above sea level to a maximum of 3050 m (10,000 ft.), no direct sustained sunlight. Maximum rate of change is 20°C/hr. (36°F/hr.). The upper limit and rate of change may be limited by the type and number of options installed.

System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).

– Extended Ambient Operating Temperature

For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL: [DL380 Gen11 Extended Ambient Temperature Guidelines](#)

For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft.) above 900 m (2953 ft.) to a maximum of 3050 m (10,000 ft.). The approved hardware configurations for this system are listed at the URL:

[DL380 Gen11 Extended Ambient Temperature Guidelines](#)

System performance may be reduced if operating in the extended ambient operating range or with a fan fault.

– Non-operating

-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr. (36°F/hr.).

Altitude

– Operating

3050 m (10,000 ft.). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft./min).

– Non-operating

9144 m (30,000 ft.). Maximum allowable altitude change rate is 457 m/min (1500 ft./min).

Acoustic Noise

Listed are the declared A-Weighted sound power levels (LwA,m) and declared average bystander position A-Weighted sound pressure levels (LpA,m) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below.

Acoustic Noise

Technical Specifications

Idle	
LwA,m	4.2 B Entry 4.2 B Base 4.2 B Performance
LpAm	28 dBA Entry 27 dBA Base 30 dBA Performance
Operating	
LwA,m	4.2 B Entry 4.2 B Base 4.2 B Performance
LpAm	29 dBA Entry 27 dBA Base 29 dBA Performance
Kv	0.4 B Entry 0.4 B Base 0.4 B Performance

Notes:

- The declared mean A-weighted sound power level, LwA,m, is computed as the arithmetic average of the measured.
- A-weighted sound power levels for a randomly selected sample, rounded to the nearest 0,1 B.
- The declared mean A-weighted emission sound pressure level, LpA,m, is computed as the arithmetic average of the measured A-weighted emission sound pressure levels at the bystander positions for a randomly selected sample, rounded to the nearest 1 dB.
- The statistical adder for verification, Kv, is a quantity to be added to the declared mean A-weighted sound power level, LwA,m, such that there will be a 95 % probability of acceptance, when using the verification procedures of ISO 9296, if no more than 6,5 % of the batch of new equipment, has A-weighted sound power levels greater than (LwA,m + Kv).
- The quantity, LwA,c (formerly called LwAd), can be computed from the sum of LwA,m and Kv.
- All measurements made to conform to ISO 7779 / ECMA-74 and declared to conform to ISO 9296 / ECMA-109.
- B, dB, abbreviations for bels and decibels, respectively, where 1 B = 10 dB.
- The results in this declaration apply only to the model numbers listed above when operating and tested according to the indicated modes and standards. A system with additional configuration components or increased operating functionality may increase the noise emission values.
- Systems under abnormal conditions may increase the noise level, people in the vicinity of the product [cabinet] for extended periods of time should consider wearing hearing protection or using other means to reduce noise exposure.

Emissions Classification (EMC) – Regulatory Information

To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center:

<https://www.hpe.com/support/Safety-Compliance-EnterpriseProducts>

Environment-friendly Products and Approach End-of-life Management and Recycling

Hewlett Packard Enterprise offers [end-of-life product return, trade-in, and recycling programs](#), in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The European Union Waste Electrical and Electronic Equipment Directive [EU WEEE] (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
05-Jan-2025	Version 39	Changed	Configuration Information and Core Options sections were updated.
		Added	Read Intensive – NVMe – EDSFF – Solid State Drives and Read Intensive – NVMe – EDSFF – Solid State Drives SKUs.
		Removed	Intel® Xeon® and HPE InfiniBand obsolete SKUs.
01-Dec-2025	Version 38	Changed	Core Options section was updated
		Added	Midline – 12G SAS – LFF Drives, Mixed Use – NVMe – EDSFF – Solid State Drives Read Intensive – NVMe – SFF – Solid State Drives
		Removed	25 Gigabit Ethernet adapters
03-Nov-2025	Version 37	Changed	Pre-Configured Models, Configuration Information, Core Options, and Additional Options sections were updated.
		Added	Read Intensive – NVMe – SFF – Solid State Drives, 1 Gigabit Ethernet adapters, 10 Gigabit Ethernet adapters, 25 Gigabit Ethernet adapters, 100 Gigabit Ethernet Adapters, HPE InfiniBand & Ethernet Adapters, HPE Boot Controllers, and Essential RAID Controllers SKUs.
		Removed	4th Generation Intel® Xeon®-Gold and HPE InfiniBand & Ethernet Adapters OBS SKUs.
07-Jul-2025	Version 36	Changed	Standard Features and Additional Options sections were updated. Added: HPE Computation and Graphics Accelerators and HPE Tri-Mode Controller rules.
02-Jun-2025	Version 35	Changed	Pre-Configured Models, Configuration Information and Additional Options sections were updated. Added: Registered DIMMs DDR5 (RDIMMs) SKUs and rules and HPE Computation and Graphics Accelerators rules. Removed: Pre-Configured EU SKU P58417-421.
05-May-2025	Version 34	Changed	Core Options section was updated. Added: Software as a Service Management Enablement SKU, Added Read Intensive – NVMe – EDSFF – Solid State Drives SKU and European Union ErP Lot 9 Regulation section to include Turkey and Ireland.
07-Apr-2025	Version 33	Changed	Core Options section was updated. Added: Read Intensive NVMe EDSFF SSDs, Mixed Use NVMe EDSFF SSDs, Read Intensive NVMe SFF SSDs, Mixed Use NVMe SFF SSDs SKUs, COM Advanced SKUs and QuickSpecs Survey.
03-Mar-2025	Version 32	Changed	Core Options and Additional Options sections were updated.
03-Feb-2025	Version 31	Changed	Standard Features, Pre-Configured Models, Core Options and Additional Options sections were updated. OBS SKUs were removed. Intel® VROC Software RAID naming changed to Hybrid RAID.
20-Jan-2025	Version 30	Changed	Additional Options section was updated.
06-Jan-2025	Version 29	Changed	Overview, Core Options and Storage sections were updated.

Summary of Changes

Date	Version History	Action	Description of Change
02-Dec-2024	Version 28	Changed	Core Options and Additional Options sections were updated. (Removed OBS items: HDDs, SSDs, iLO Licenses, and Mouse/Keyboard options).
04-Nov-2024	Version 27	Changed	Standard Features, Configuration Information and Additional Options sections were updated.
07-Oct-2024	Version 26	Changed	Standard Features, Core Options and Additional Options sections were updated.
03-Sep-2024	Version 25	Changed	Standard Features (Operating Systems and Virtualization Software Support for HPE Servers) and Pre-Configured Models sections were updated.
05-Aug-2024	Version 24	Changed	Standard Features, Core Options and Additional Options sections were updated.
15-Jul-2024	Version 23	Changed	Pre-Configured Models section was updated.
01-Jul-2024	Version 22	Changed	Standard Features, Core Options and Additional Options sections were updated.
17-Jun-2024	Version 21	Changed	Pre-Configured Models section was updated.
03-Jun-2024	Version 20	Changed	Standard Features, Configuration Information, Core Options, Additional Options and Technical Specifications sections were updated.
29-Apr-2024	Version 19	Changed	Core Options section was updated.
15-Apr-2024	Version 18	Changed	Pre-Configured Models section was updated.
01-Apr-2024	Version 17	Changed	Standard Features, Pre-Configured Models, Configuration Information, Core Options and Additional Options sections were updated.
18-Mar-2024	Version 16	Changed	Pre- Configured Models section was updated.
04-Mar-2024	Version 15	Changed	Configuration Information and Core Options sections were updated
05-Feb-2024	Version 14	Changed	Overview, Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated
14-Dec-2023	Version 13	Changed	Overview, Configuration Information and Additional Options sections were updated
06-Nov-2023	Version 12	Changed	Overview, Configuration Information and Additional Options sections were updated
02-Oct-2023	Version 11	Changed	Overview, Configuration Information and Additional Options sections were updated
11-Sep-2023	Version 10	Changed	Standard Features section was updated
05-Sep-2023	Version 9	Changed	Overview, Standard Features, Configuration Information, Core Options and Memory sections were updated
24-Jul-2023	Version 8	Changed	Standard Features section was updated
10-Jul-2023	Version 7	Changed	Overview, Standard Features, Pre- Configured Models, Configuration Information and Core Options sections were updated
05-Jun-2023	Version 6	Changed	Overview, Standard Features, Pre- Configured Models, Configuration Information and Core Options sections were updated

Summary of Changes

Date	Version History	Action	Description of Change
01-May-2023	Version 5	Changed	Standard Features, Configuration Information, Core Options and Technical Specifications sections were updated.
03-Apr-2023	Version 4	Changed	Standard Features, Pre- Configured Models, Configuration Information, Core Options and Technical Specifications sections were updated.
06-Mar-2023	Version 3	Changed	Standard Features and Core Options sections were updated.
15-Feb-2023	Version 2	Changed	Standard Features section was updated
10-Jan-2023	Version 1	New	New QuickSpecs

[Shape the Future of QuickSpecs - Your Input Matters](#)

[Chat now](#)

© Copyright 2026 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Intel® and Xeon® are registered trademarks of Intel Corporation in the U.S. and other countries.
Microsoft®, Windows®, and Windows Server® are U.S. registered trademarks of the Microsoft group of companies.

a50004307enw - 16911 - Worldwide - V39 - 05-January-2026
HEWLETT PACKARD ENTERPRISE
HPE.com

